

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/21	


APPROVED: _____


DATE: _____ TITLE: _____

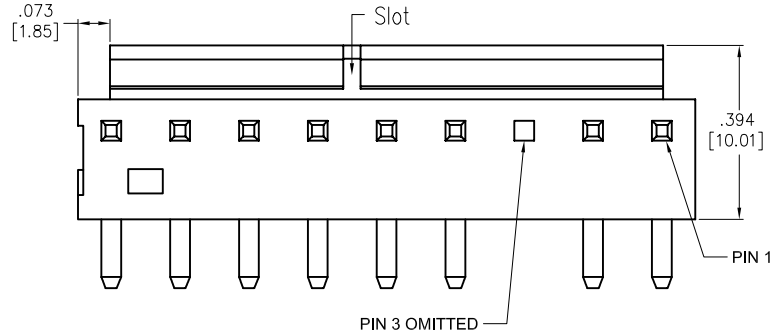

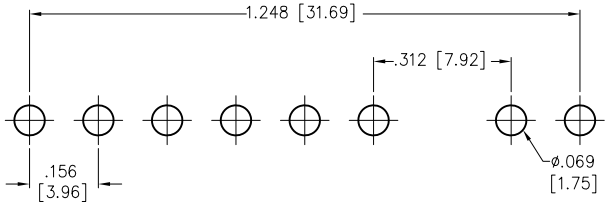

RECOMMENDED P.C.B LAYOUT

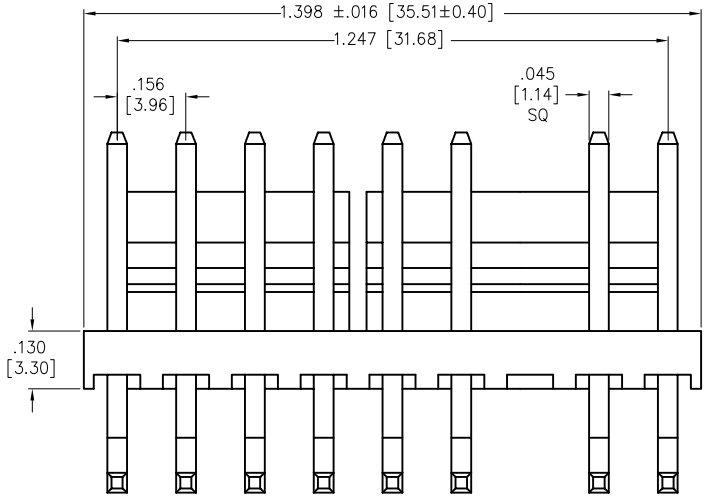

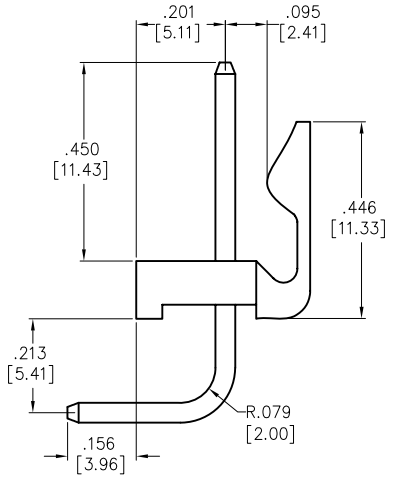

SPECIFICATIONS:
Material:
Insulator: PA46, Glass reinforced, rated UL 94V-0
Insulator color: Natural
Contacts: Brass
Plating:
Gold flash over Nickel underplate overall
Electrical:
Current rating: 5.0 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC/DC
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	LH	12/3/21
CHECKED	KC	12/3/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] HEADER, 9 POSITION, RIGHT ANGLE, PIN 3 REMOVED, GOLD PLATED

SIZE	PART NO.	REV.
X	LHDA-09-GRA-X03-NY46	-

REF: S00019C | SCALE: NTS | SHEET 1 OF 1