

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/20	
A		UPDATE DRAWING	2/26/20	AY/KL
B		UPDATE DIM.	4/24/20	AY/NL

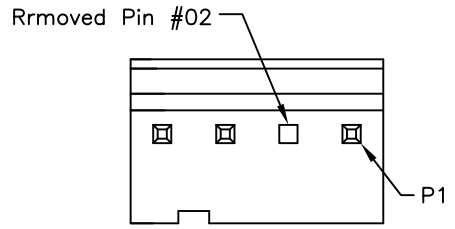

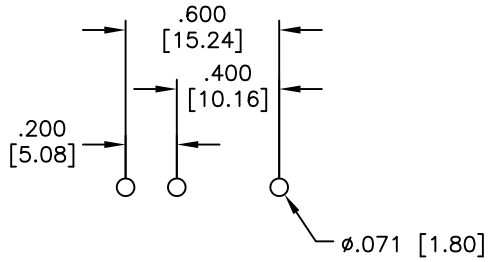

RECOMMENDED PCB LAYOUT

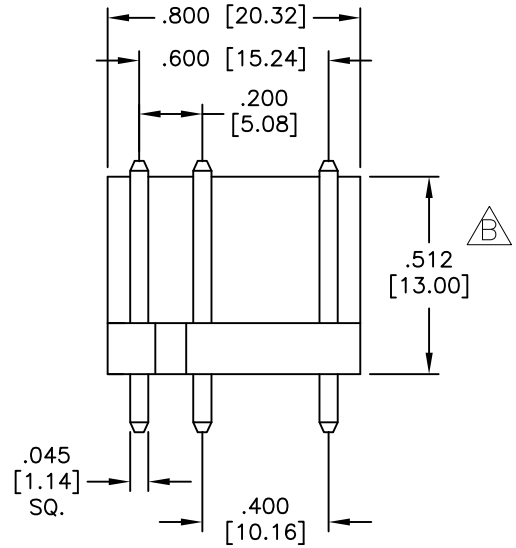

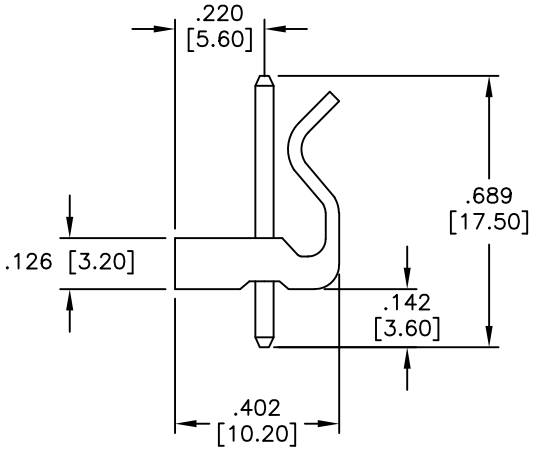

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Current rating: 7.0 A
Voltage rating: 250V AC, DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/17/20
CHECKED	KL	1/17/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .200 [5.08] POWER HEADER, STRAIGHT WITH LOCK POLARIZER, 4P, REMOVED PIN 2

SIZE	PART NO.	REV.
X	LHF-04-SA1-X02-V2	B

REF:	SCALE:	SHEET
S00123T	NTS	1 OF 1