

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/6/12	


APPROVED: _____


DATE: _____ TITLE: _____

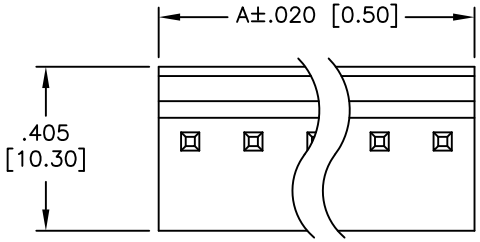

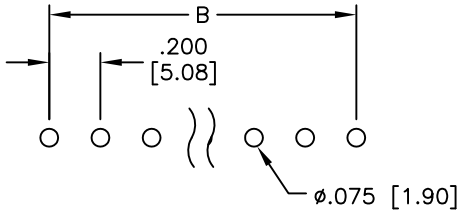

RECOMMENDED
PCB LAYOUT

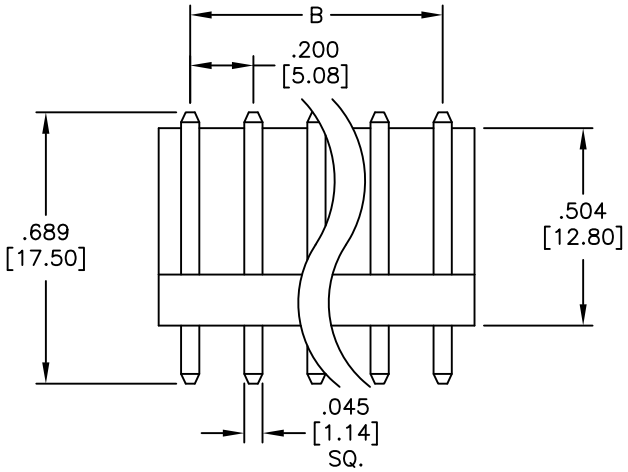

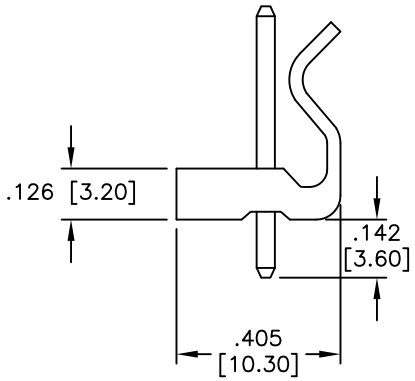

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC/DC
Current rating: 7 VAC/DC
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 10
A = .200 [5.08] x No. of Positions
B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/6/12
CHECKED	CC	7/6/12
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .200 [5.08] POWER HEADER
STRAIGHT, WITH LOCK POLARIZER, V2

SIZE	PART NO.	REV.
X	LHF-XX-SA1-V2	-

REF:	SCALE:	SHEET
S00016T	NTS	1 OF 1