
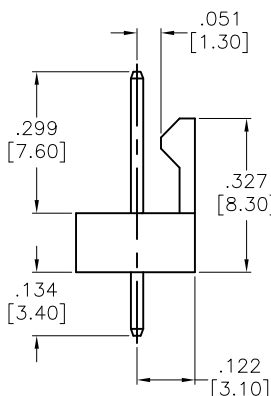
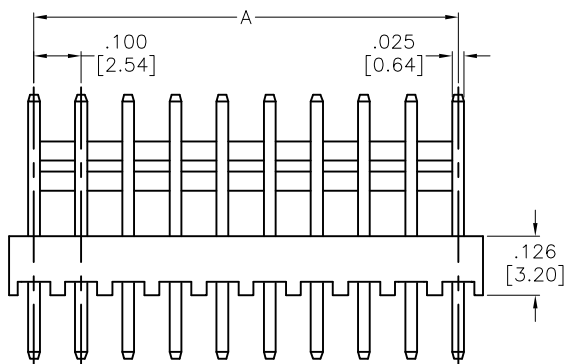
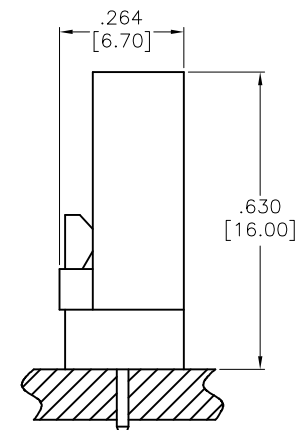
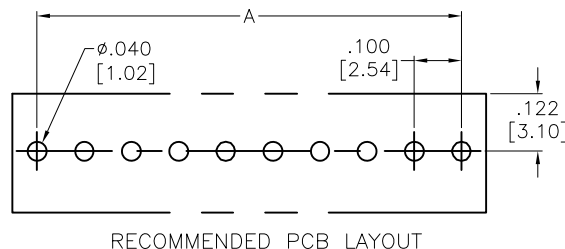


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/26/18	
A		UPDATE SPEC.	1/30/20	AY/KC

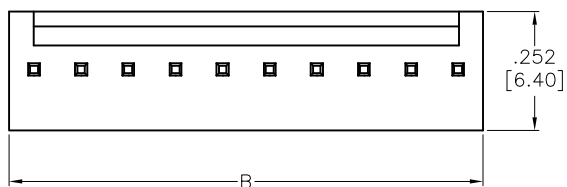

ASSEMBLY VIEW

Unit: mm

Poles	Dimension(mm)		Poles	Dimension(mm)	
	A	B		A	B
02	2.54±0.15	5.10±0.20	12	27.94±0.30	30.64±0.35
03	5.08±0.15	7.68±0.20	13	30.48±0.30	33.20±0.35
04	7.62±0.15	10.24±0.20	14	33.02±0.30	35.74±0.35
05	10.16±0.15	12.78±0.20	15	35.56±0.30	38.30±0.35
06	12.70±0.20	15.24±0.25	16	38.10±0.30	40.84±0.35
07	15.24±0.20	17.88±0.25	17	40.64±0.30	43.40±0.35
08	17.78±0.20	20.44±0.25	18	43.18±0.30	45.94±0.35
09	20.32±0.30	23.00±0.35	19	45.72±0.30	48.50±0.35
10	22.86±0.30	25.54±0.35	20	48.26±0.30	51.05±0.35
11	25.40±0.30	28.10±0.35			

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contacts: Brass, Tin plated
 Electrical:
 Current rating: 3A AC/DC
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES [MM]	MM	ANGLE
X.X ± .010	See chart	X.X ± 1°
X.XX ± .020		
X.XXX ± .015		

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	AY	9/26/18
CHECKED	LW	9/26/18
APPROVED		

TITLE		.100 [2.54] LOCKING HEADER SHORT BACK, STRAIGHT, PCB	
SIZE	PART NO.	LHS-B-XX-TS	
X		REV. A	
REF:	S00124T	SCALE:	NTS
		SHEET 1 OF 1	