
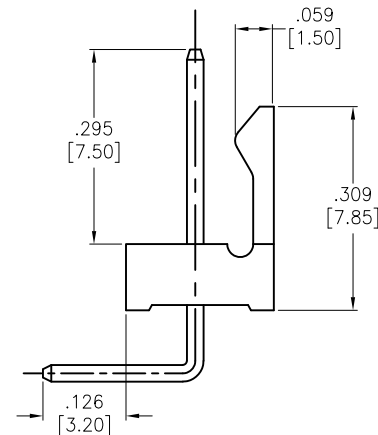
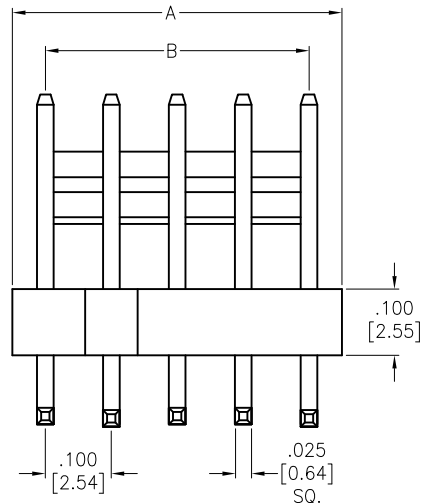



APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

| Rev | AWO # | Description | Date     | Appr  |
|-----|-------|-------------|----------|-------|
| -   |       | RELEASED    | 12/22/09 |       |
| A   |       | ADDED DIM.  | 11/15/13 | GC/HR |
| B   |       | ADDED DIM.  | 5/03/21  | JJ/SC |

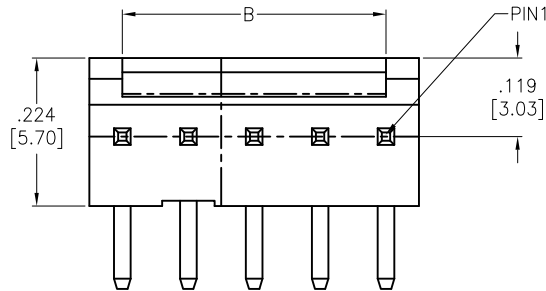

#### SPECIFICATIONS:

Material:  
Insulator: Nylon 66, glass fiber UL 94V-0  
Insulator color: Natural  
Contacts: Brass  
Plating:  
Tin over Copper underplate overall  
Electrical:  
Current rating: 8 AMP Per Pin (20AWG)  
Contact resistance: 20 mohms max  
Insulation resistance: 1000 Mohms min  
Dielectric withstanding voltage: 250 V AC for 1 minute  
Temperature Rating:  
Operating temperature: -25°C to +85°C  
Environmental:  
Lead free, RoHS compliant



Positions: 2, 3, 4, 6, 8, 10  
A= .100 [2.54] x No. of Positions  
B= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS  
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

| INCHES      | HOLES        |
|-------------|--------------|
| .X ± .10    | Ø.X ± .10    |
| .XX ± .020  | Ø.XX ± .015  |
| .XXX ± .015 | Ø.XXX ± .010 |

|          |    |          |
|----------|----|----------|
| DRAWN    | DY | 12/22/09 |
| CHECKED  |    |          |
| APPROVED |    |          |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY  
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN  
PERMISSION FROM ADAM TECH

**ADAM**  
**TECH**

909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE  
.100 [2.54] WIRE TO BOARD HEADER  
RIGHT ANGLE, DIP TYPE

|              |                       |              |
|--------------|-----------------------|--------------|
| SIZE<br>X    | PART NO.<br>LHT-XX-TR | REV.<br>B    |
| REF: S00059T | SCALE: NTS            | SHEET 1 OF 1 |