

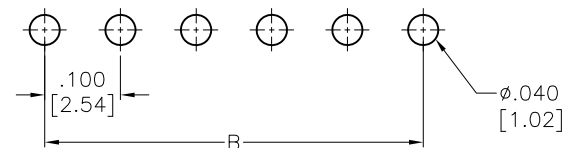
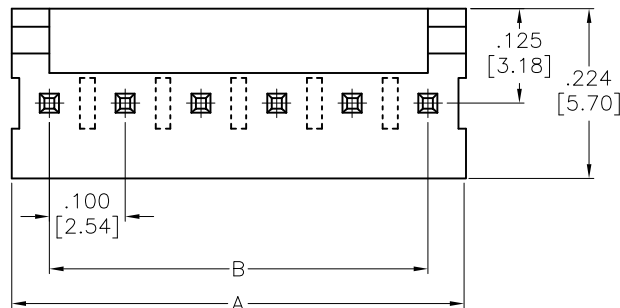


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/17	

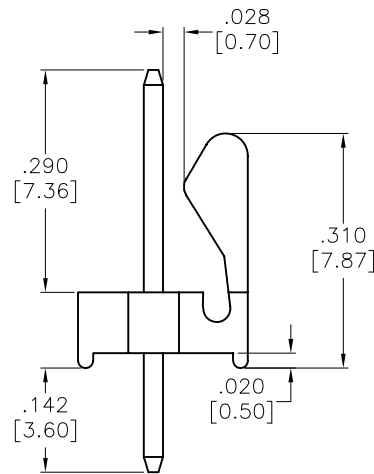

RECOMMENDED PCB LAYOUT

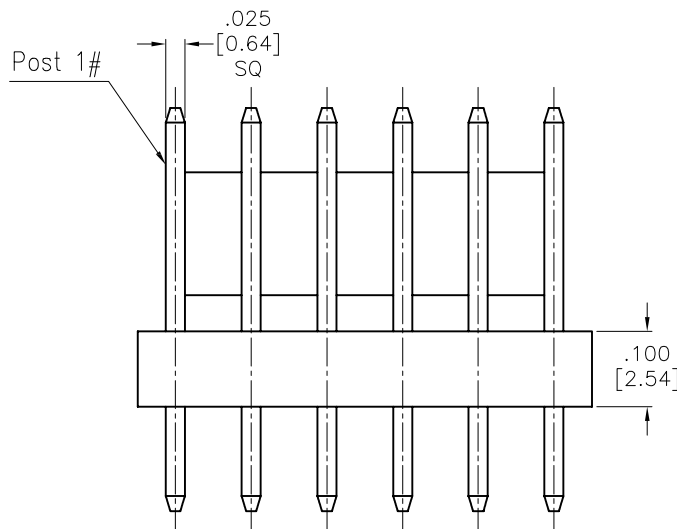

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: White
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 3.0A
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 2 thru 20
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES		HOLES		TITLE .100 [2.54] WIRE TO BOARD HEADER STRAIGHT, DIP TYPE			
.X	± .10	Ø.X	± .10	SIZE	PART NO.		REV.
.XX	± .020	Ø.XX	± .015	X	LHTA-XX-GS		-
.XXX	± .015	Ø.XXX	± .010	REF:	S00019C	SCALE: NTS	SHEET 1 OF 1
APPROVALS		DATE					
DRAWN	AY	3/30/17					
CHECKED	IC	3/30/17					
APPROVED							