




Rev	AWO #	Description	Date	Appr
-		RELEASED	11/12/13	

APPROVED: _____

DATE: _____ TITLE: _____

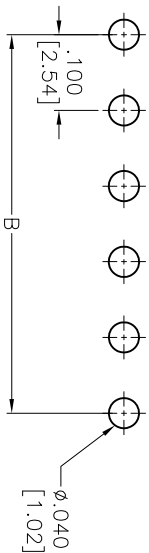

RECOMMENDED PCB LAYOUT

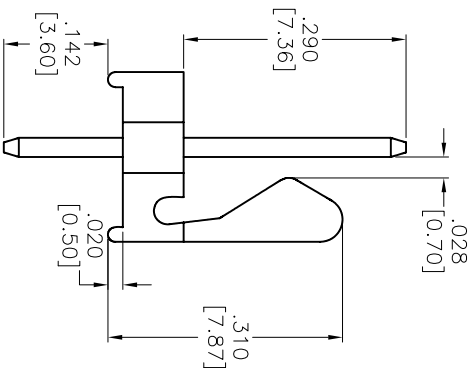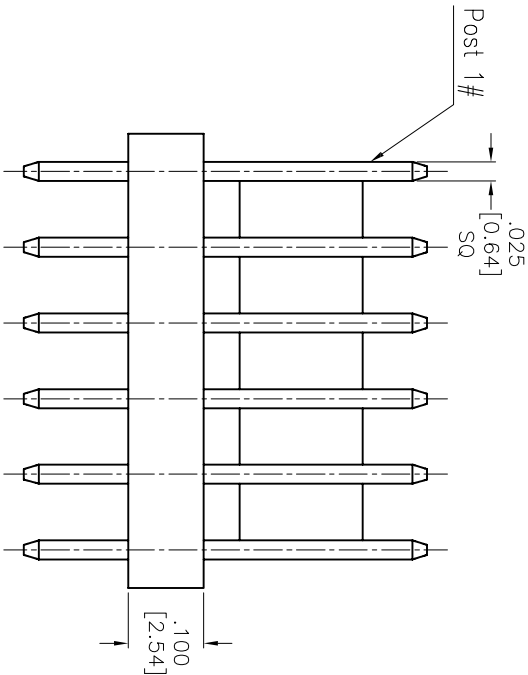

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Current rating: 3.0A

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

ROHS
COMPLIANT

Positions: 2 thru 20
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

100 [2.54] WIRE TO BOARD HEADER
STRAIGHT, DIP TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				TITLE .100 [2.54] WIRE TO BOARD HEADER STRAIGHT, DIP TYPE			
APPROVALS				DATE			
DRAWN	AY			11/12/13			
CHECKED	GC			11/12/13			
APPROVED							
SIZE PART NO.				REV.			
X LHTA-XX-TS				-			
REF: \$00019C	SCALE: NTS		SHEET 1 OF 1				