
Rev	AWO #	Description	Date	Appr
-		RELEASED	6/09/10	
A		REDRAWN	9/18/12	

APPROVED: _____

DATE: _____ TITLE: _____

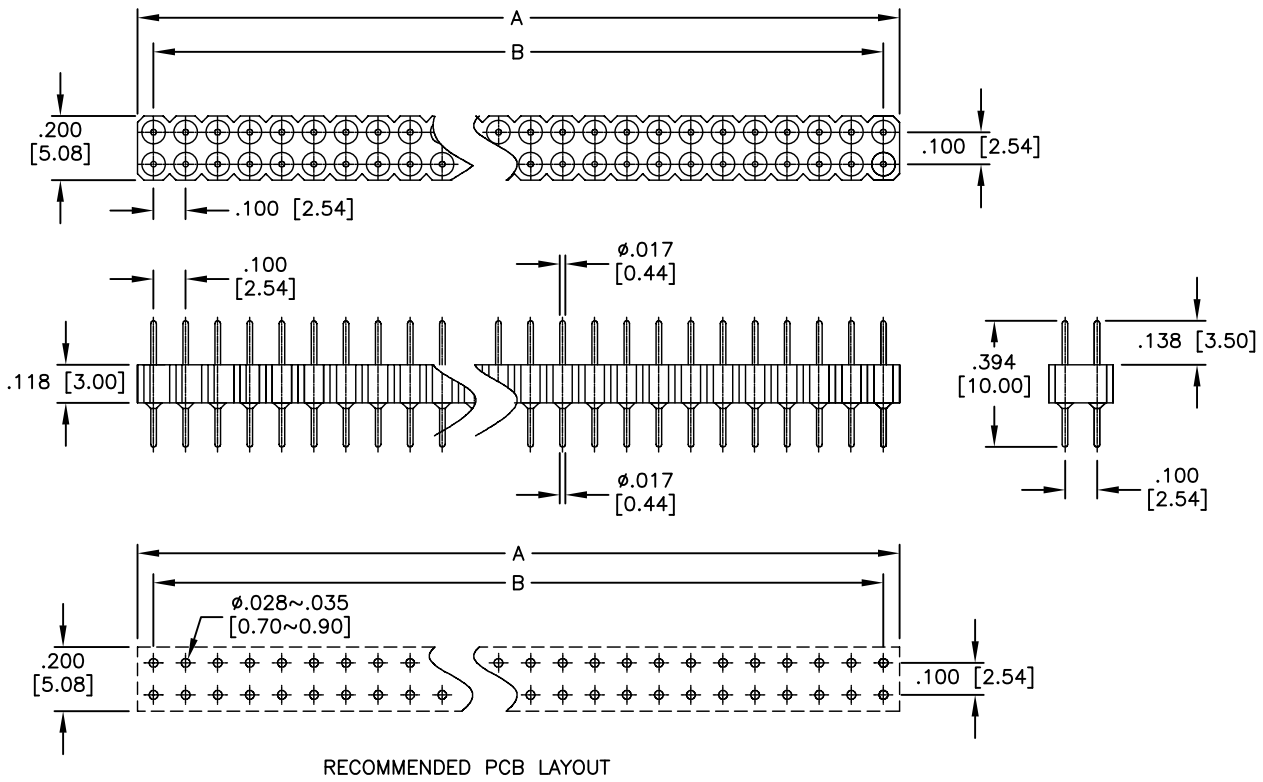

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Polyamide, glass reinforced, rated UL 94V-0
Insulator color: Black
Pin (Our Sleeve): Brass
Plating:
Gold flash over Nickel underplate overall.
Electrical:
Voltage rating: 100VRMS/150 VDC
Current rating: 3 Amp max
Insulation resistance: 10000MΩ min @ 500VAC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 80
A = .100 [2.54] x No. of Positions per Row
B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/09/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: SCREW MACHINE TERMINAL STRIP, DUAL ROW STRAIGHT, .100" PITCH, GOLD PLATED

SIZE	PART NO.	REV.
X	MCT-2-XX-1-G	A

REF: S00007T | SCALE: NTS | SHEET 1 OF 1