
APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/04	
A		REDRAWN	2/6/14	AY/KW
B		REVISED STRIPPED DIM.	11/14/14	AY/LL

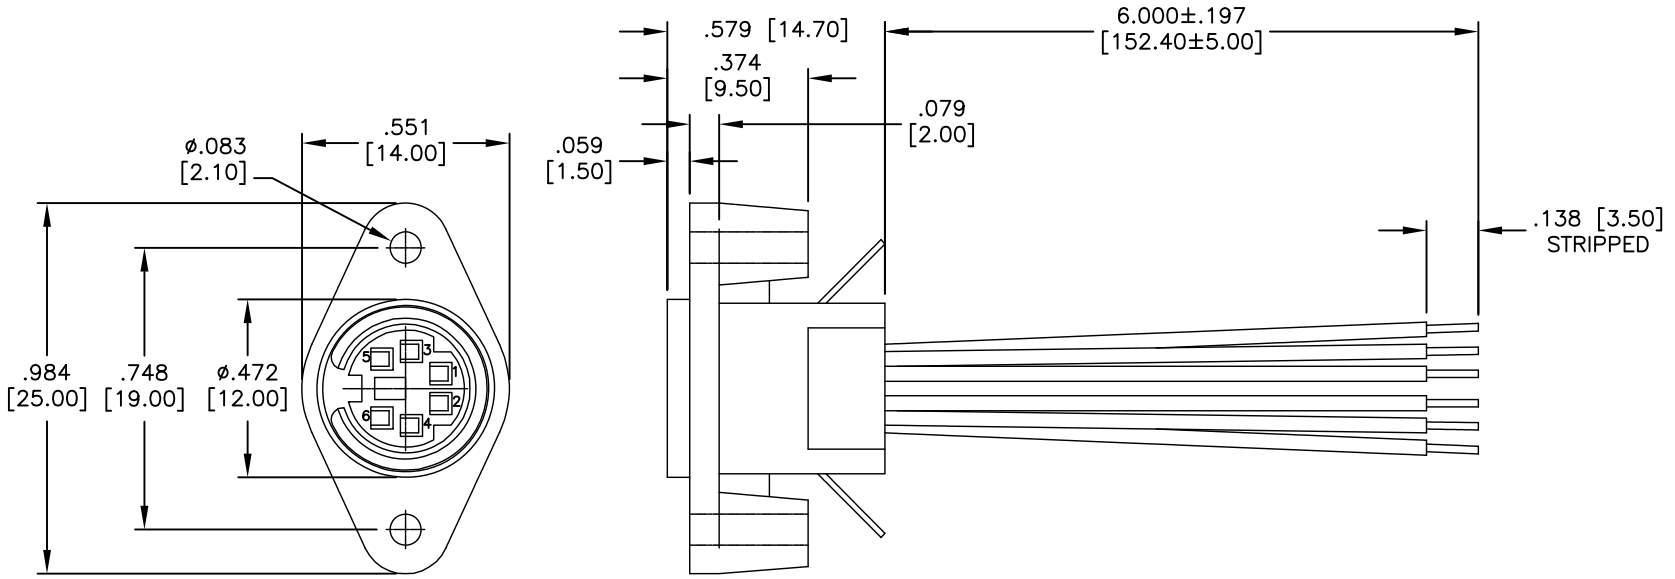

MATING FACE CONFIGURATIONS							
P/N		MDE-003-W	MDE-004-W	MDE-005-W	MDE-006-W	MDE-007-W	MDE-008-W
WIRE COLOR	1	BLACK	BLACK	BROWN	BROWN	BROWN	BROWN
	2	GREEN	GREEN	BLACK	WHITE	WHITE	WHITE
	3	ORANGE	YELLOW	GREEN	BLACK	BLACK	BLACK
	4	--	RED	YELLOW	GREEN	GREEN	BLUE
	5	--	--	RED	YELLOW	YELLOW	GREEN
	6	--	--	--	RED	ORANGE	YELLOW
	7	--	--	--	--	RED	ORANGE
	8	--	--	--	--	--	RED

SPECIFICATIONS:
Material:
Insulator: PBT, glass filled, rated UL 94V-0
Insulator color: Black
Contact Terminal: Phosphor Bronze, Tin plated
Earth Terminal: Phosphor Bronze, Tin plated
Wire: 26AWG
Electrical:
Operating voltage: 100 VAC/12 VDC max.
Current rating: 1 Amp max./2 Amps max.
Contact resistance: 30 mohms max. initial
Insulation resistance: 50 Mohms min @ DC 250V.
Dielectric withstanding voltage: 250 VAC for 1 minute
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	12/30/04
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI DIN JACK, PANEL MOUNT W/ FLANGES, 6" WIRE LEADS STRIPPED .138 [3.50]

SIZE	PART NO.	REV.
X	MDE-00X-W	B

REF:	SCALE:	SHEET
S00250T	NTS	1 OF 1