

6

5

4

3


2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/30/05	

APPROVED: _____

DATE: _____ TITLE: _____

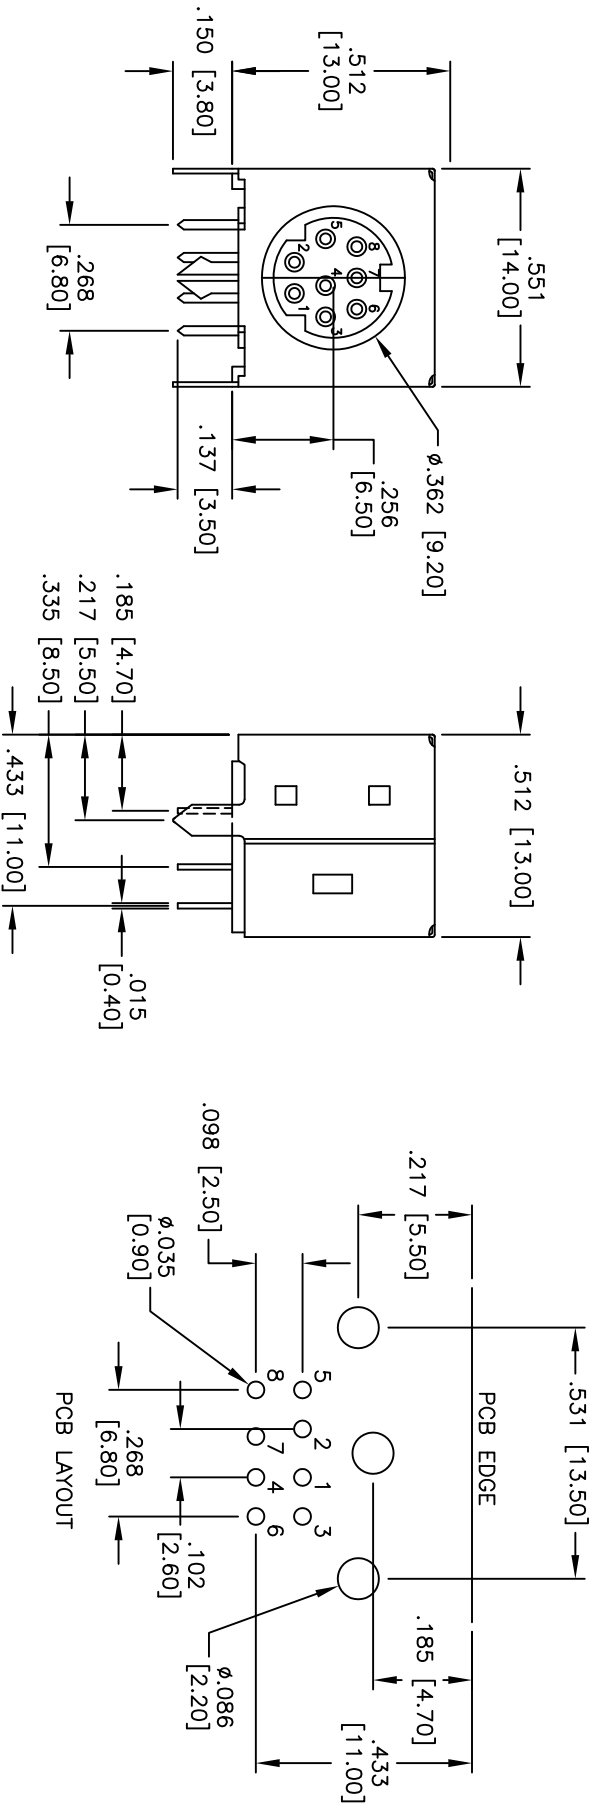

MATING FACE CONFIGURATIONS					
MDJ-003-FS-GRN	MDJ-004-FS-GRN	MDJ-005-FS-GRN	MDJ-006-FS-GRN	MDJ-007-FS-GRN	MDJ-008-FS-GRN

SPECIFICATIONS:

Material:

Insulator: PBT, glass filled, rated UL 94V-0

Insulator color: Green, Pantone color 3395C

Contacts: Phosphor Bronze

Shield: Copper Alloy, Tin plated

Plating:

Gold over Nickel underplate on contact area, Tin over Copper underplate on tails

Electrical:

Operating voltage: 100 VAC/12 VDC max.

Current rating: 1 Amp max./2 Amps max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +70°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		Holes		DATE	
X .10		ØXX .10			
XX .020		ØXX .015			
XXX .015		ØXXX .010			
APPROVALS					
DRAWN	SS	12/30/05			
CHECKED					
APPROVED					
TITLE		SIZE		REV.	
MINI DIN JACK, RIGHT ANGLE, FULL SHIELD		PART NO.			
GREEN, PANTONE COLOR 3395C		MDJ-00X-FS-GRN			
REF:		SCALE: NTS		SHEET 1 OF 1	

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710