
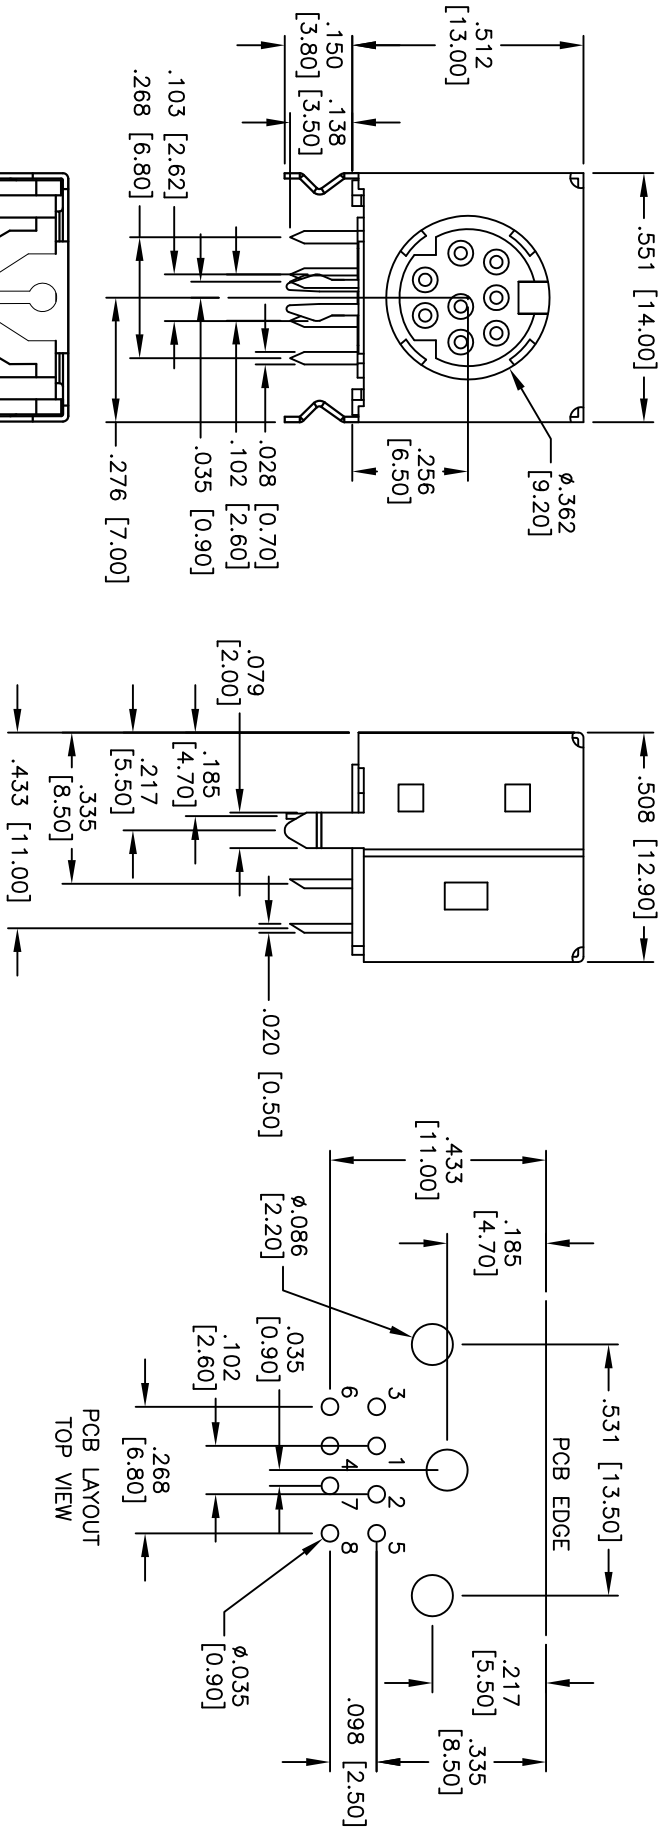


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/22/15	

APPROVED: _____
DATE: _____ TITLE: _____



SPECIFICATIONS:

Material:
Insulator: PBT, glass filled, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shield: Copper Alloy, Tin plated
Plating:
Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails
Electrical:
Operating voltage: 100 VAC/12 VDC max.
Current rating: 1 Amp max./2 Amps max.
Contact resistance: 30 mohms max. initial
Insulation resistance: 100 Mohms min.
Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +70°C
Environmental:
Lead free, RoHS compliant.

MATING FACE CONFIGURATIONS

MDU-003-FS-RT	MDU-004-FS-RT	MDU-005-FS-RT	MDU-006-FS-RT	MDU-007-FS-RT	MDU-008-FS-RT

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI DIN JACK, RIGHT ANGLE, FULL SHIELD
HIGH TEMP, RETENTION LEGS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		DRAWN		DATE	
X	± .10	ØXX	± .10	AY	5/22/15
XX	± .020	ØXX	± .015	CHECKED	
XXX	± .015	ØXXX	± .010	APPROVED	
APPROVALS		SIZE		REV.	
		PART NO.			
		MDU-XXX-FS-RT			
REF: S0005T		SCALE: NTS		SHEET 1 OF 1	