



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/18/14	

APPROVED: _____

DATE: _____ TITLE: _____

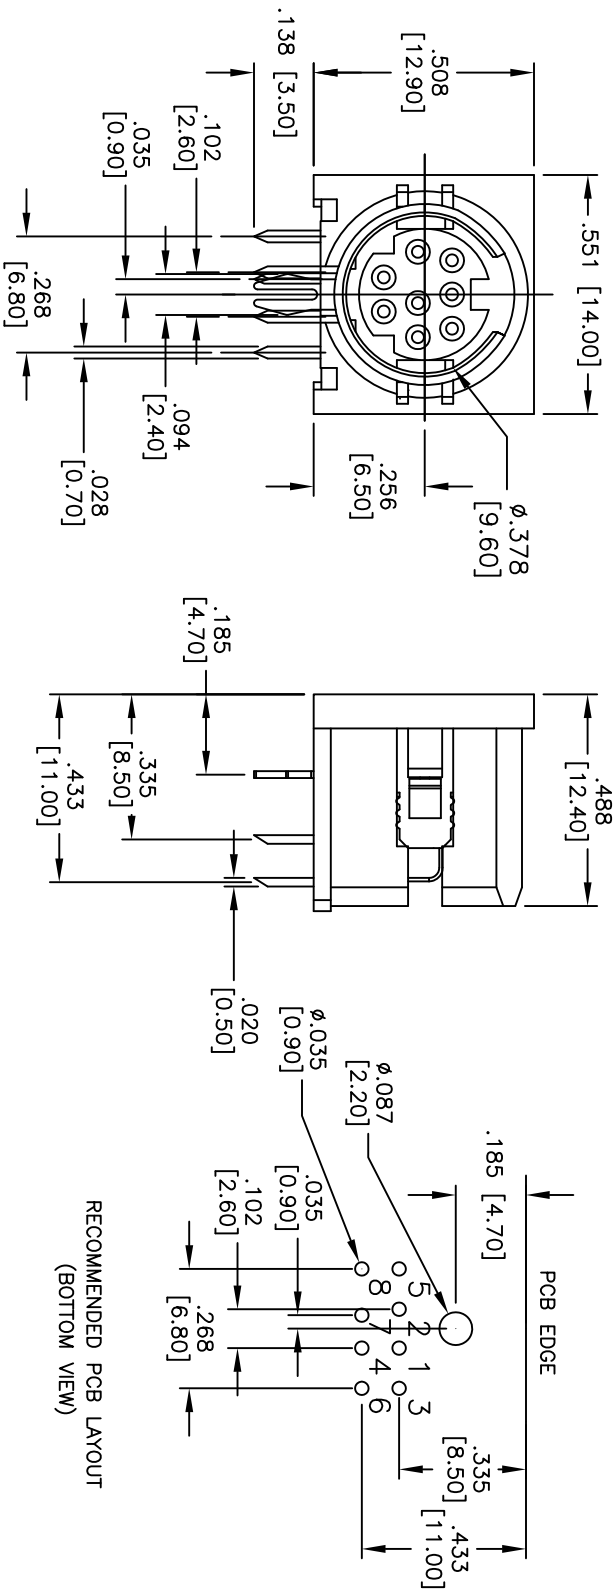

SPECIFICATIONS:

Material:

Insulator: HI-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Copper alloy

Plating:

Gold over Nickel underplate on contact area,

Tin over Copper underplate on tails

Electrical:

Operating voltage: 100 VAC/12 VDC max.

Current rating: 1 Amp max./2 Amps max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 250 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +70°C

Environmental:

Lead free, RoHS compliant.

MATING FACE CONFIGURATIONS

MDJ-003-HT	MDJ-004-HT	MDJ-005-HT	MDJ-006-HT	MDJ-007-HT	MDJ-008-HT

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

MINI DIN JACK, RIGHT ANGLE, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES Holes .X ± .10 .XX ± .020 .XXX ± .015 APPROVALS DATE				REV.			
DRAWN	AY	11/18/14	SIZE	PART NO.	MDJ-00X-HT		
CHECKED	GC	11/18/14	X				
APPROVED			REF:	S00095T	SCALE: NTS	SHEET 1 OF 1	