


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/11/07	
A		REDRAWN	6/10/11	
B		UPDATE SHAPE	12/16/14	AY

APPROVED: _____
DATE: _____ TITLE: _____

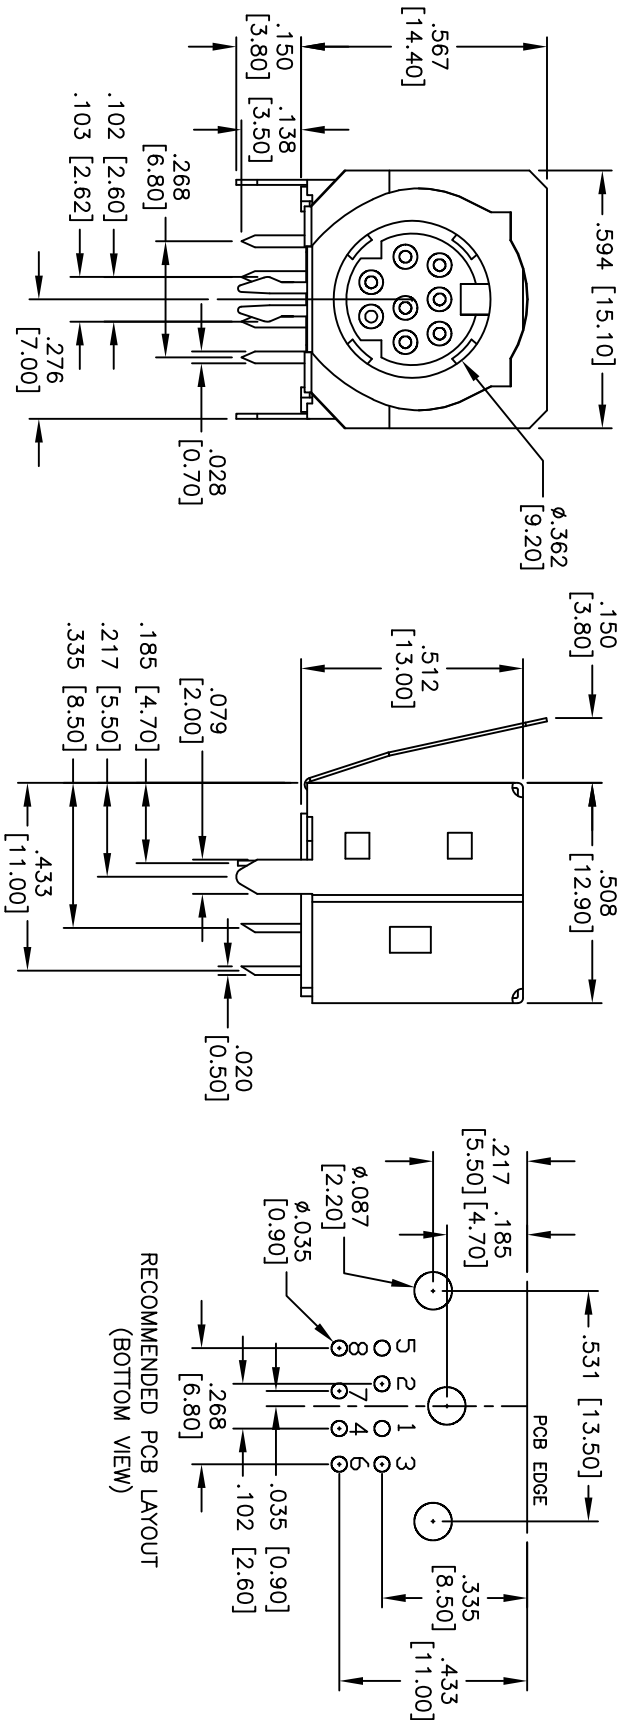

MATING FACE CONFIGURATIONS					
MDJ-003-FS-PG	MDJ-004-FS-PG	MDJ-005-FS-PG	MDJ-006-FS-PG	MDJ-007-FS-PG	MDJ-008-FS-PG

SPECIFICATIONS:

Material:
Insulator: PBT, Glass reinforced rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shield: Brass, Tin plated
Spring Shield: Stainless

Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails

Electrical:
Rated Voltage & Current: DC12V/2A Max; AC100V/1A MAX
Contact resistance: 30 mohms max.
Insulation resistance: 100 Mohms min.@500V DC
Dielectric withstanding voltage: 250 VAC for 1 minute

Environmental:
Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
X ± .10 ϕ XX ± .10 .XX ± .020 ϕ XXX ± .015 .XXX ± .015 ϕ XXXX ± .010		TITLE MINI DIN JACK, FULLY SHIELDED WITH PANEL GROUND	
APPROVALS	DATE	SIZE	PART NO.
DRAWN	WGM	4/11/07	MDJ-XXX-FS-PG
CHECKED		X	
APPROVED		REF: S00095T	SCALE: NTS
		SHEET 1 OF 1	REV. B