
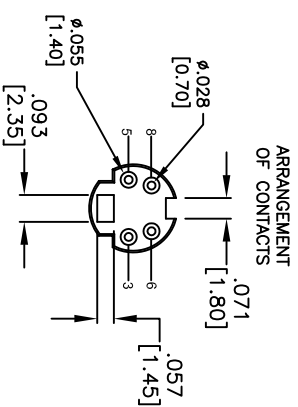
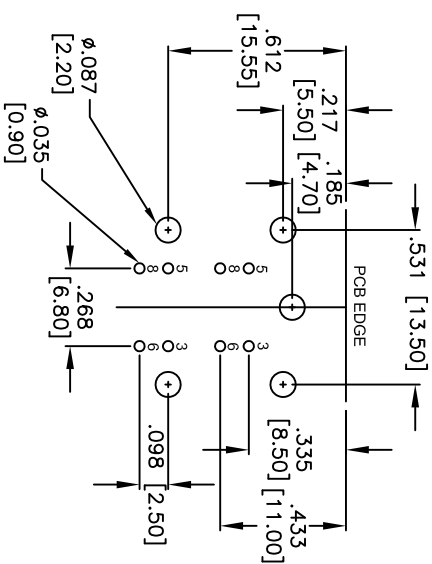
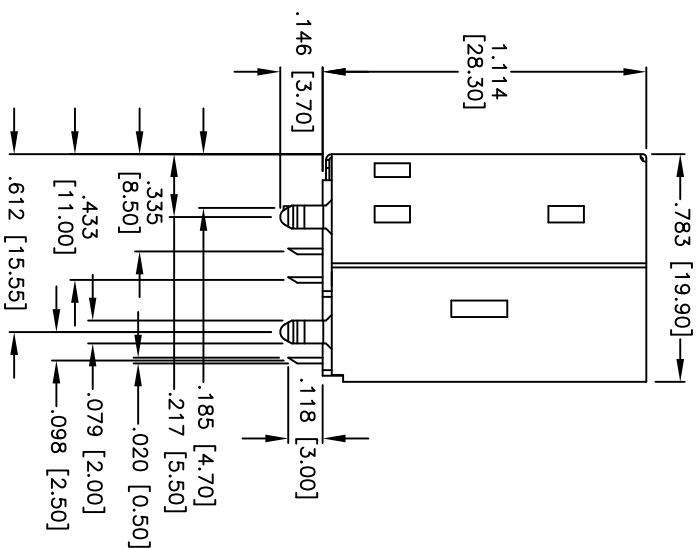


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/23/06	
A		REDRAWN	4/26/12	

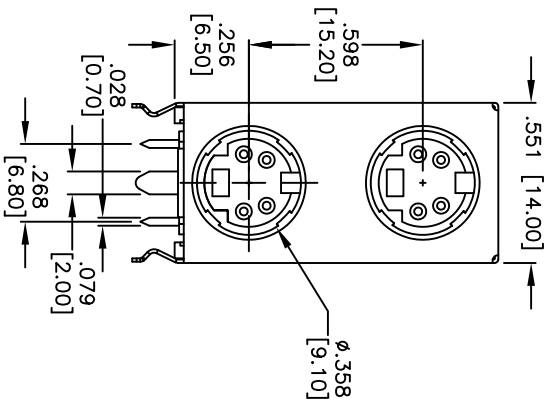

SPECIFICATIONS:

Material:

Insulator: PBT, glass filled, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Shield: Copper Alloy, Tin plated

Plating:

Gold over Nickel underplate on contact area, Tin over

Copper underplate on tails

Electrical:

Operating voltage: 100 VAC/1/2 VDC max.

Current rating: 1 Amp max./2 Amps max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min @500 VDC.

Dielectric withstanding voltage: 250 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

MINI DIN JACK, STACKED 4 POSITION
RIGHT ANGLE, FULLY SHIELDED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN	SS			1/23/06				SIZE	PART NO.	MDJD-004-FS-RT	REV.
CHECKED								X			A
APPROVED								REF:	S00096T	SCALE: NTS	SHEET 1 OF 1