


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/09	


APPROVED: _____

DATE: _____ TITLE: _____

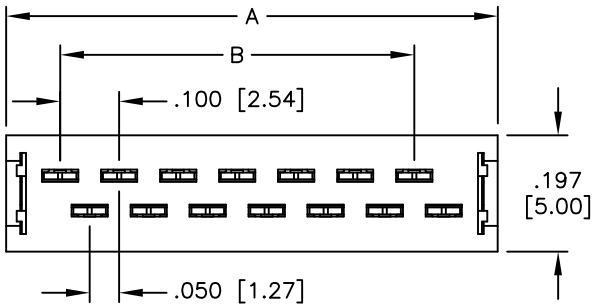

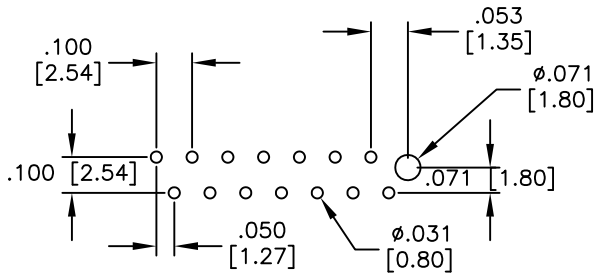

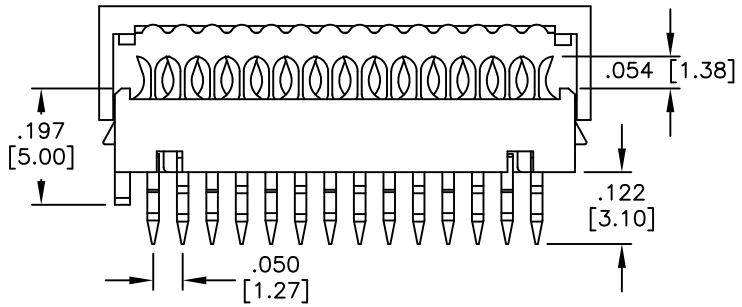

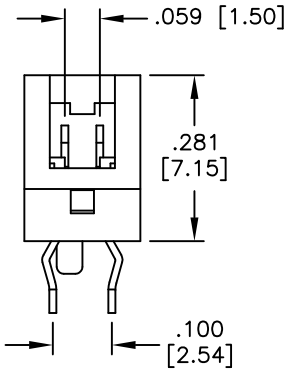

SPECIFICATIONS:
Material:
Insulator: Plastic, rated UL 94V–0
Insulator color: Red
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall
Electrical:
Voltage rating: 30V AC/DC
Current rating: 1A AC/DC
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding: 500V AC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 4 thru 26
A = .050 [1.27] x No. of Positions + .133 [3.37]
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	12/10/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] IDC CONNECTOR, FLAT CABLE TO PCB PLUG

SIZE	PART NO.	REV.
X	MFC-XX-F-T	-

REF: S00056T | SCALE: NTS | SHEET 1 OF 1