
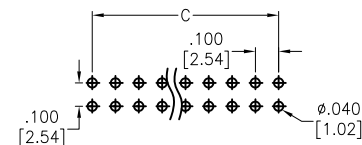



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/17	
A		UPDATE DRAWING	12/20/19	OW/TY

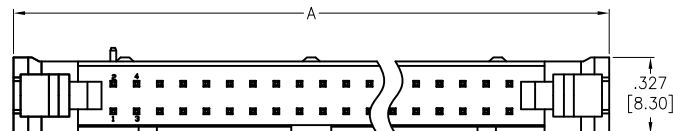


RECOMMENDED PCB LAYOUT




10, 14, 16 PIN



20, 24, 26, 30, 34, 40, 50 PIN



60, 64 PIN

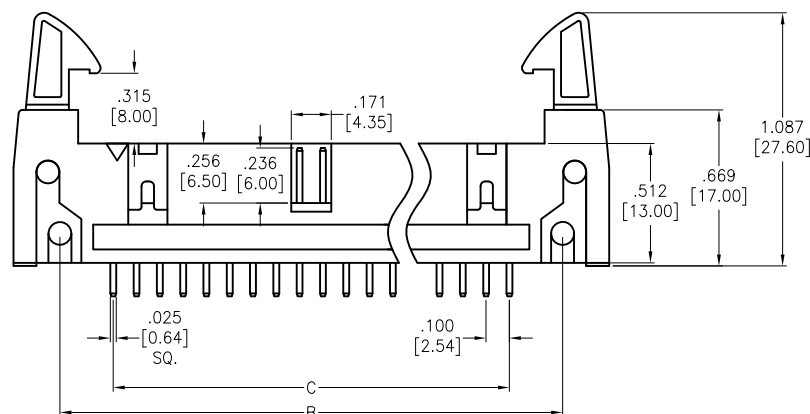

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 3 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 500 VAC
 Temperature Rating:
 -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



Positions: 06 thru 64

A= .100 [2.54] x No. of Positions per Row + .756 [19.20]

B= .100 [2.54] x No. of Positions per Row + .354 [9.00]

C= .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	6/22/17
CHECKED	MY	6/22/17
APPROVED		

ADAM
TECH
 INTERCONNECTS

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE		.100 [2.54] SHROUDED HEADER W/ LONG LATCHES, 2 ROW	
SIZE		VERTICAL, GOLD PLATED, MULTIPLE POLARIZATION	
PART NO.	MHR-A-XX-VUAL-MP		REV. A
REF: S00111C	SCALE: NTS	SHEET 1 OF 1	