

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/29/05	
A		REVISED Spec.	5/4/12	
B		UPDATE DRAWING	3/30/18	AY/LW

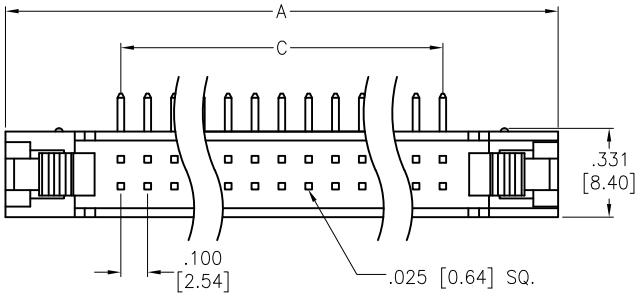

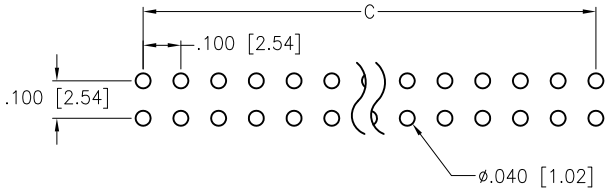

RECOMMENDED PCB LAYOUT

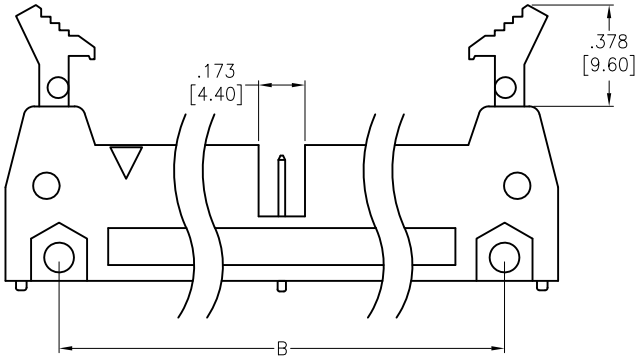



SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area,
Ton over copper underplate on solder tails

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: −55°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60, 64

A = .100 [2.54] x No. of Spaces + .860 [21.84]

B = .100 [2.54] x No. of Spaces + .460 [11.68]

C = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/29/05
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: LATCHED BOX HEADER, RIGHT ANGLE, LONG EJECTOR LATCHES

SIZE	PART NO.	REV.
X	MHR-XX-HSGAL-Y	B

REF:	SCALE:	SHEET
S00089T	NTS	1 OF 1