


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/25/10	
A		ADDED DRAWING	12/25/18	AY/RC1






60, 64 PIN

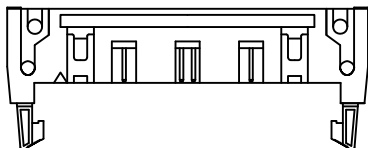


20, 24, 26, 30, 34, 40, 50 PIN



10, 14, 16 PIN

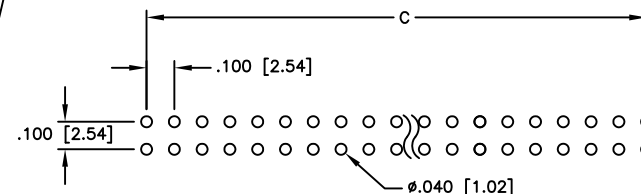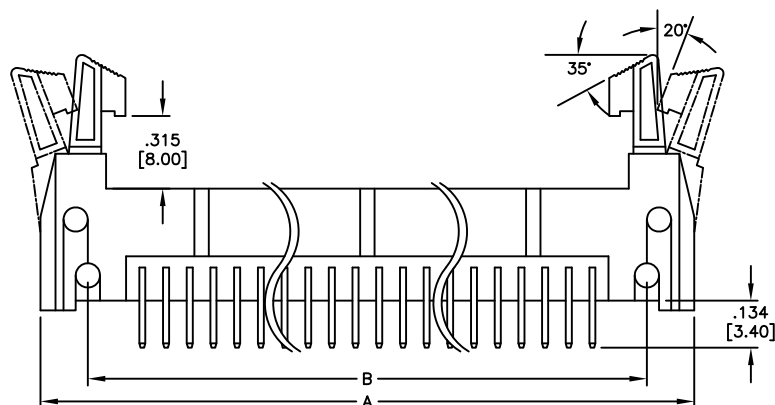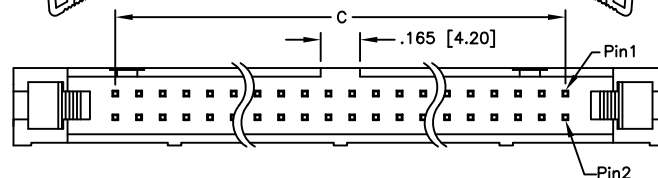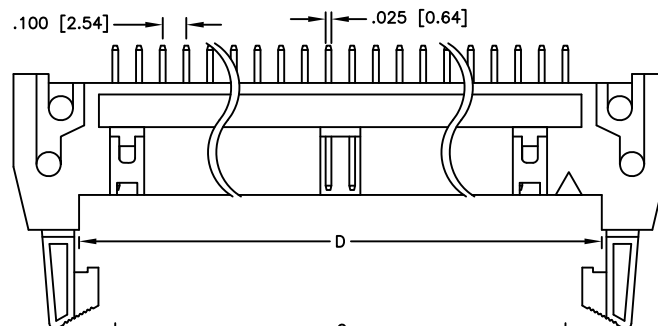

RECOMMENDED PCB LAYOUT

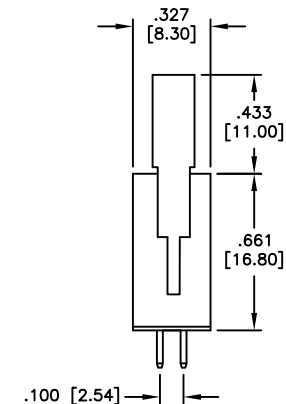

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0, Color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Copper underplate on tails.

Electrical:

Current rating: 1 Amp

Contact Resistance: 10 mohm max

Insulation resistance: 1000 Mohm min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant.



Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64

A = .100 [2.54] x No. of Spaces + .855 [21.71]

B = .100 [2.54] x No. of Spaces + .454 [11.54]

C = .100 [2.54] x No. of Spaces

D = .100 [2.54] x No. of Spaces + .305 [7.74]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

DY

3/25/10

CHECKED

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
LATCH BOX HEADER, VERTICAL TYPE
LONG EJECTOR LATCHES

SIZE

X

PART NO.

MHR-XX-VSGAL

REV.P

A

REF: S00059T

SCALE: NTS

SHEET 1 OF 1