

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/18	
A		UPDATE DRAWING	8/24/20	OW/BL


APPROVED: _____

DATE: _____ TITLE: _____

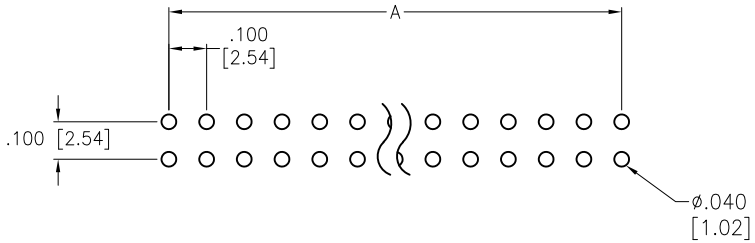

RECOMMENDED PCB LAYOUT

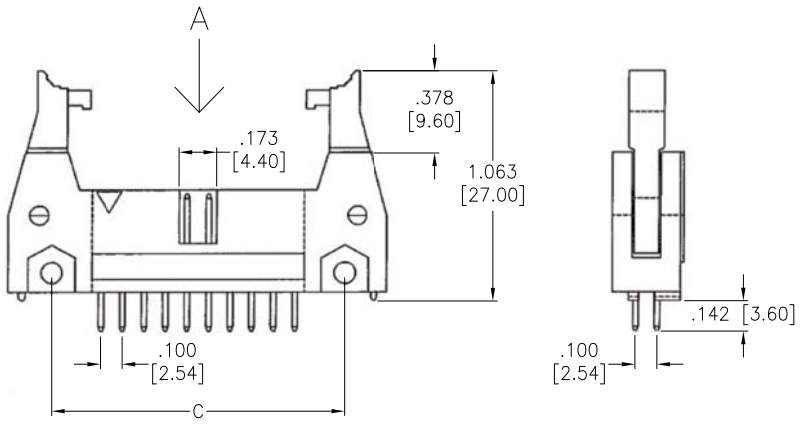

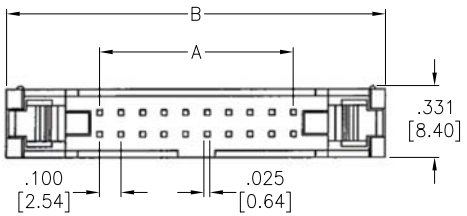

VIEW A

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating:
Gold flash over Nickel underplate on contact area,
Tin over copper underplate on solder tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: −55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64
A = .100 [2.54] x No. of Spaces
B = .100 [2.54] x No. of Spaces + .860 [21.84]
C = .100 [2.54] x No. of Spaces + .460 [11.68]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	3/30/18
CHECKED		
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: LATCHED BOX HEADER, VERTICAL, LONG EJECTOR LATCHES

SIZE	PART NO.	REV.Y
X	MHR-XX-VSGAL-Y	A

REF: S00251T | SCALE: NTS | SHEET 1 OF 1