

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/16/04	
A		UPDATE DRAWING	10/2/19	AY/TW
B		UPDATE DRAWING	1/18/22	WX/KC


APPROVED: _____


DATE: _____ TITLE: _____

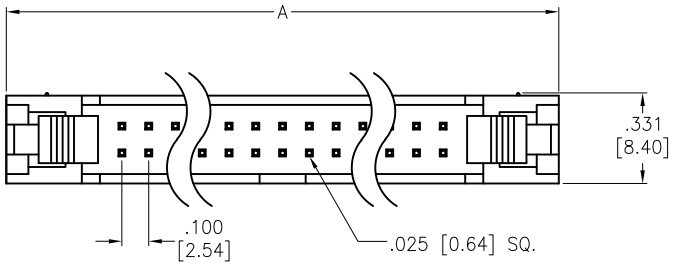

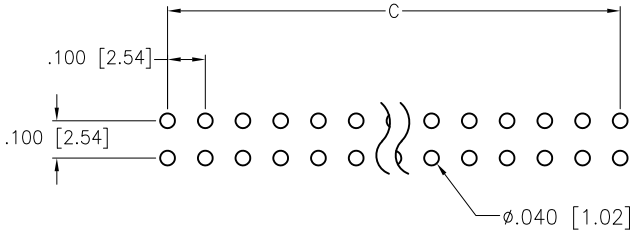

RECOMMENDED P.C.B LAYOUT

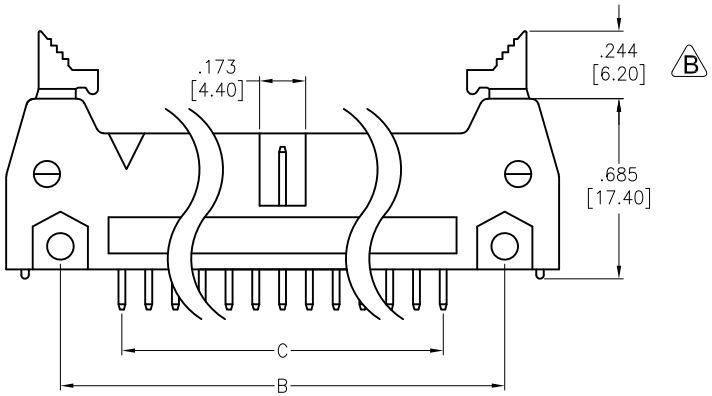

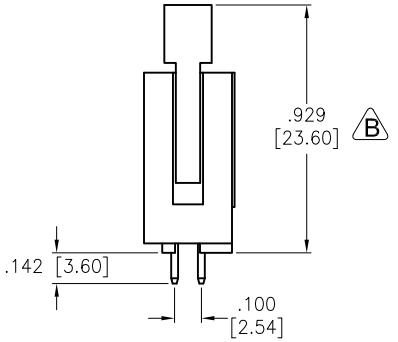

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area,
Tin over copper underplate on solder tails

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max (B)

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64

A = .100 [2.54] x No. of Spaces + .860 [21.84]

B = .100 [2.54] x No. of Spaces + .460 [11.68]

C = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	SS	9/16/04
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

TITLE: LATCHED BOX HEADER, VERTICAL, SHORT EJECTOR LATCHES

SIZE	PART NO.	REV.
X	MHR-XX-VSGAS-Y	B

REF:	SCALE:	SHEET
S00089T	NTS	1 OF 1