
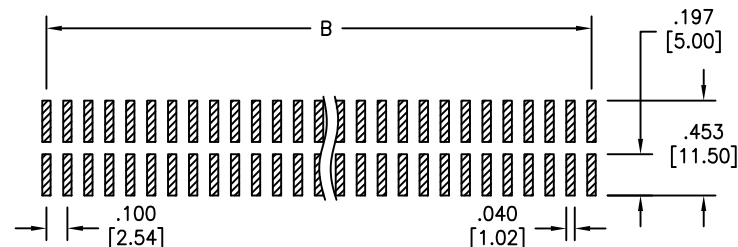




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/16/10	
A		REVISED DIM.	11/23/12	
B		UPDATE DRAWING	6/20/17	AY/RC

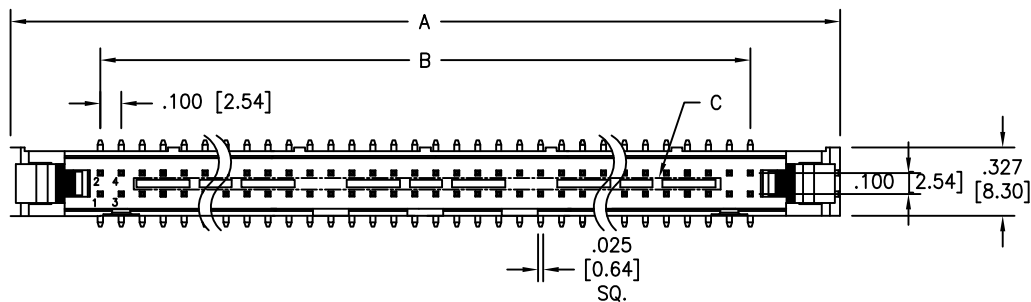

RECOMENDED PCB LAYOUT

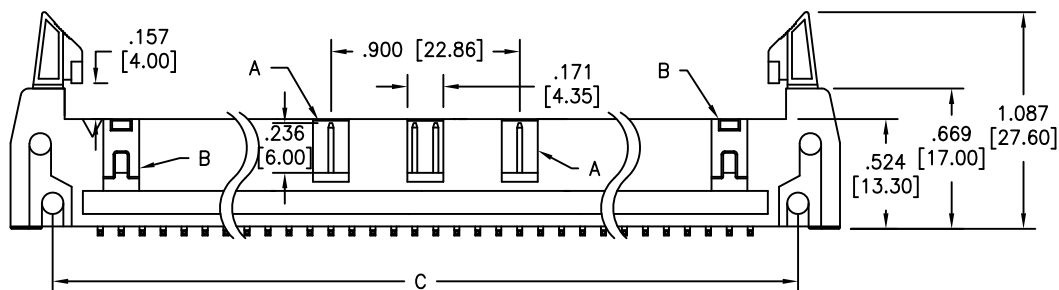

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC/DC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.



06P-18P Without Slot "A" and "B"

20P-58P Without Slot "A", With Slot "B"

60P-64P With Slot "A" and "B" "C"

Positions: 6, 8, 10, 12, 14, 16, 18, 20, 24, 26, 30, 34, 40, 50, 60, 64

A= .100 [2.54] x No. of Spaces + .856 [21.74]

B= .100 [2.54] x No. of Spaces

C= .100 [2.54] x No. of Spaces + .454 [11.54]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ±.10 Ø.X ±.10
.XX ±.020 Ø.XX ±.015
.XXX ±.015 Ø.XXX ±.010

APPROVALS		DATE
DRAWN	AY	11/16/10
CHECKED	VW	11/16/10
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE			
.100 [2.54] SHROUDED HEADER W/ SHORT LATCHES, VERTICAL SMT, 2 ROW, GOLD PLATED, MULTIPLE POLARIZATION			
SIZE	PART NO.	REV.	
X	MHR-XX-VUAS-SMT-MP	B	
REF:	S00019C	SCALE:	NTS
		SHEET 1 OF 1	