

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/6/15	
A		UPDATE DRAWING	4/21/16	AY/AT
B		UPDATE SPEC.	3/10/23	WX/WL

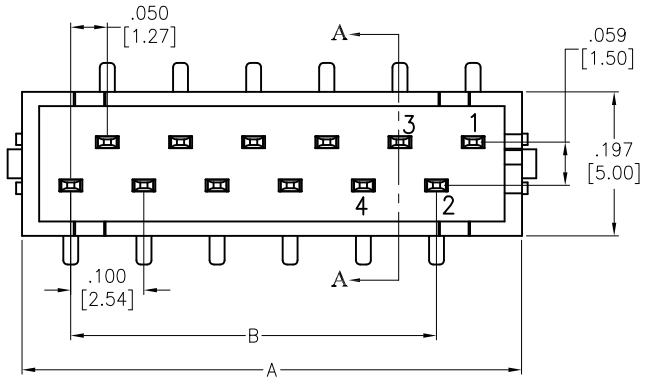





SECTION A–A

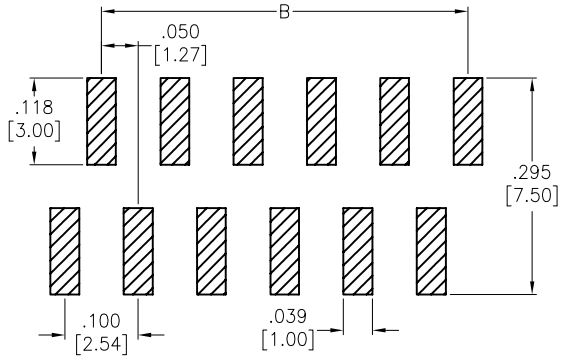

RECOMMENDED PCB LAYOUT

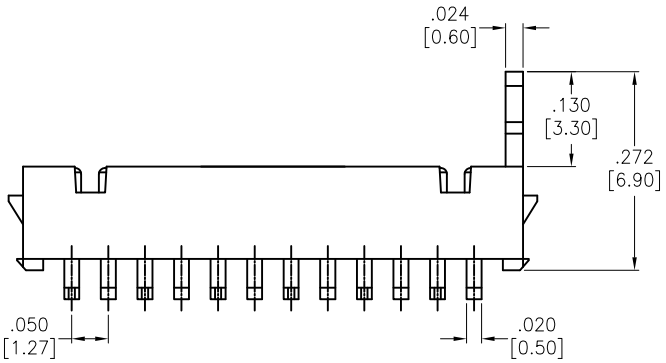

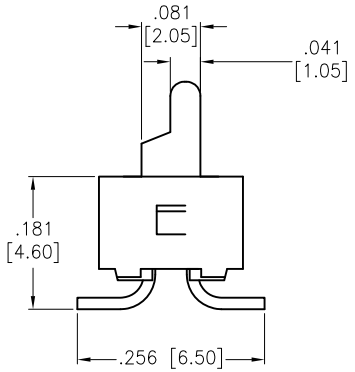

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Red
Contacts: Phosphor Bronze
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 1.0 Amp
Contact resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding: 500 V AC/DC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Positions: 04 thru 26
A = .100 [2.54] x No. of Spaces per row + .183 [4.66]
B = .100 [2.54] x No. of Spaces per row

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	AY	1/6/15
CHECKED	GC	1/6/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .100 [2.54] MIN FLEX CONNECTOR MALE, SMT TYPE, TIN PLATED

SIZE	PART NO.	REV.
X	MPH-A-XX-SMT-T	B

REF: S00019C | SCALE: NTS | SHEET 1 OF 1