

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/20	

APPROVED: _____

DATE: _____ TITLE: _____

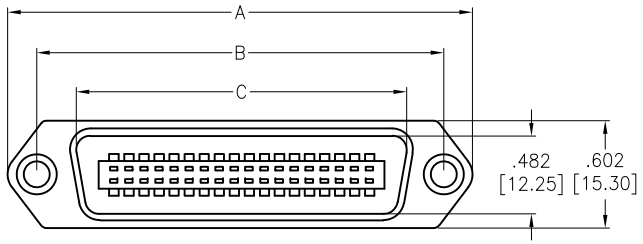

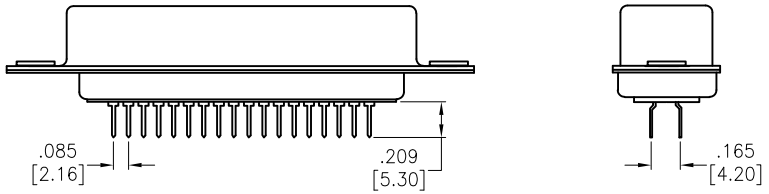

MRXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
MR14	14	1.728 [43.90]	1.417 [36.00]	1.004 [25.50]
MR24	24	2.154 [54.70]	1.843 [46.80]	1.429 [36.30]
MR36	36	2.665 [67.70]	2.350 [59.70]	1.941 [49.30]
MR50	50	3.260 [82.80]	2.949 [74.90]	2.535 [64.40]

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Blue
Contacts: Brass
Shell: SPCC, Nickel plated
Plating:
Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on solder tails
Electrical:
Current rating: 1 Amperes
Contact resistance: 30 mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC RMS
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	6/8/20
CHECKED	BC	6/8/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
MINIATURE RIBBON PLUG
PCB TERMINALS, .120 [3.05] HOLES

SIZE	PART NO.	REV.
X	MRXX-PC-3-A	-

REF:	SCALE:	SHEET
S00001T	NTS	1 OF 1