


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/05	
A		REDRAWM	04/08/13	
B		UPDATED DRAWING	3/19/15	HR/NP
C		UPDATED DRAWING	5/20/15	HR/NP
D		UPDATED DIM.	8/16/16	AY

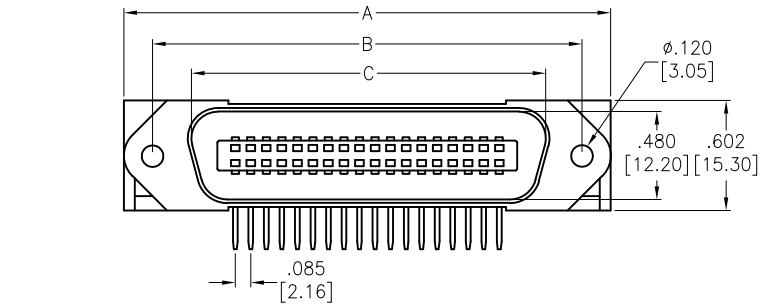

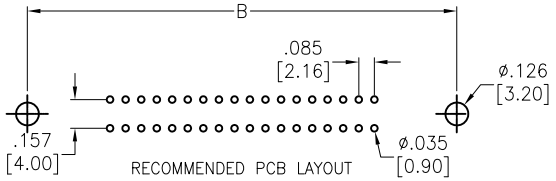



SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Blue
Contacts: Phosphor Bronze
Shell: Steel, Nickel plated
Hood: Steel, Nickel plated
Plating:
Gold flash over Nickel underplate on Contact area,
Tin over Nickel underplate on Solder area.
Electrical:
Current rating: 1 Amp
Contact resistance: 25 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: −55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

MRXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
MR14	14	1.728 [43.90]	1.417 [36.00]	1.004 [25.50]
MR24	24	2.154 [54.70]	1.843 [46.80]	1.429 [36.30]
MR36	36	2.665 [67.70]	2.350 [59.70]	1.941 [49.30]
MR50	50	3.260 [82.80]	2.949 [74.90]	2.535 [64.40]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	5/18/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MINIATURE RIBBON PLUG
RIGHT ANGLE PCB, .120 [3.05] HOLES

SIZE	PART NO.	REV.
X	MRXX-PD-3	D

REF:	SCALE:	SHEET
S00033T	NTS	1 OF 1