

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/20/05	


APPROVED: _____


DATE: _____ TITLE: _____

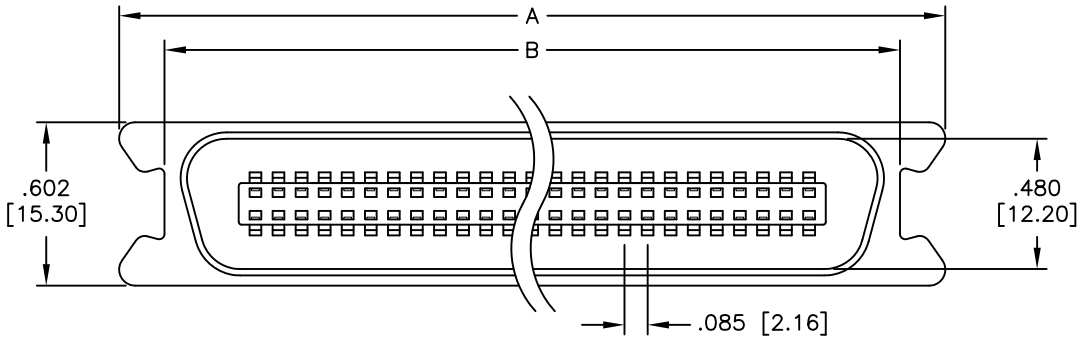

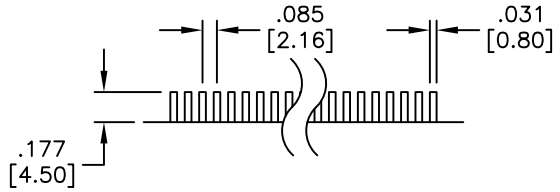

EDGE OF PC BOARD

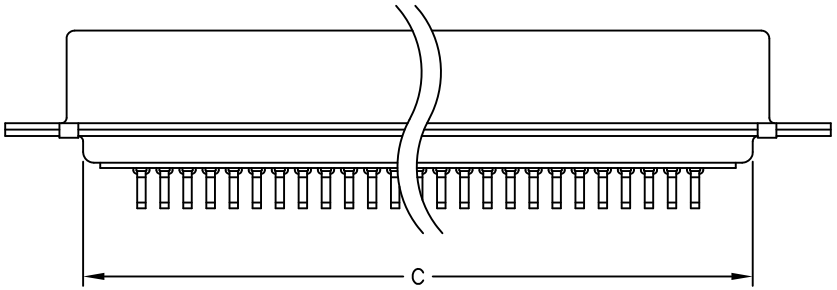

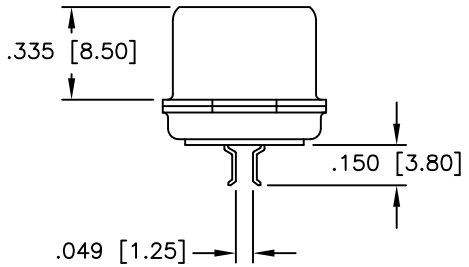

MRXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
MR14	14	1.516 [38.50]	1.157 [29.40]	.862 [21.90]
MR24	24	1.941 [49.30]	1.583 [40.20]	1.287 [32.70]
MR36	36	2.441 [62.00]	2.106 [53.50]	1.803 [45.80]
MR50	50	3.047 [77.40]	2.689 [68.30]	2.406 [61.10]

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Shell: Steel, Nickel plated
Plating:
Gold flash over Nickel underplate on mating area,
Tin over Copper underplate on tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 1 Amp max
Contact resistance: 25 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	5/20/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MINIATURE RIBBON PLUG
STRADDLE MOUNT TAILS, NOTCH EARS

SIZE	PART NO.	REV.
X	MRXX-PG-2-BK	-

REF: | SCALE: NTS | SHEET 1 OF 1