


APPROVED: _____

DATE: _____ TITLE: _____

Rev	VWO #	Description	Date	Appr
-		RELEASED	6/19/20	
A		UPDATE DIM.	2/17/22	LH/TL
B		ADDED SPEC.	2/18/22	LH/TL

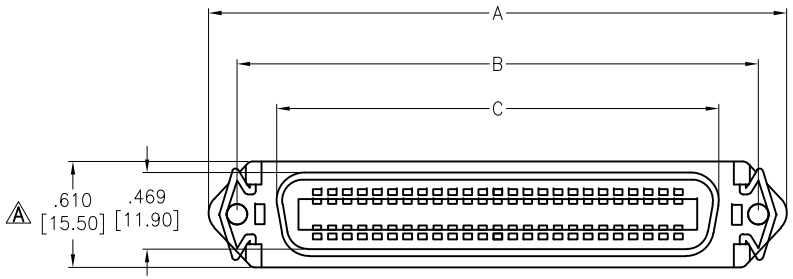

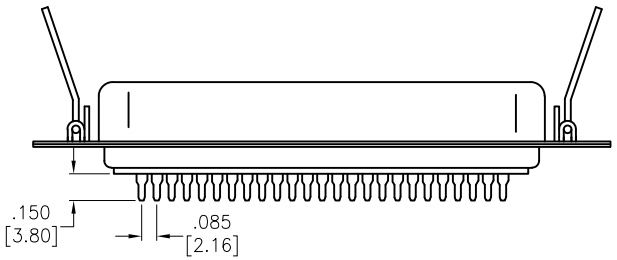



XXP	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
14P	14	1.729 [43.92]	1.417 [35.99]	.992 [25.20]
24P	24	2.154 [54.71]	1.842 [46.79]	1.417 [36.00]

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Blue
Contacts: Brass
Shell: Cold Rolled Steel, Nickel plated
Plating:
Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails
Electrical:
Current rating: 1 Amperes
Contact resistance: 30 mohms max
Insulation resistance: 500 Mohms min @ DC 500V
Dielectric withstanding voltage: 500 VAC R.M.S
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Note:
The Spring Latches is Separated From the Body

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	LH	6/19/20
CHECKED	BC	6/19/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MINIATURE RIBBON SOCKET, .120 [3.05] HOLES SOLDER TERMINALS, W/ TRIANGLE TAGGER

SIZE	PART NO.	REV.
X	MRXX-SA-1-TT-LI-A	B

REF:	SCALE:	SHEET
S00001T	NTS	1 OF 1