
Rev	AWO #	Description	Date	Appr
-		RELEASED	6/5/19	
A		UPDATE DIM. & ADDED TOLERANCES	8/19/19	AY/NP

APPROVED: _____

DATE: _____ TITLE: _____

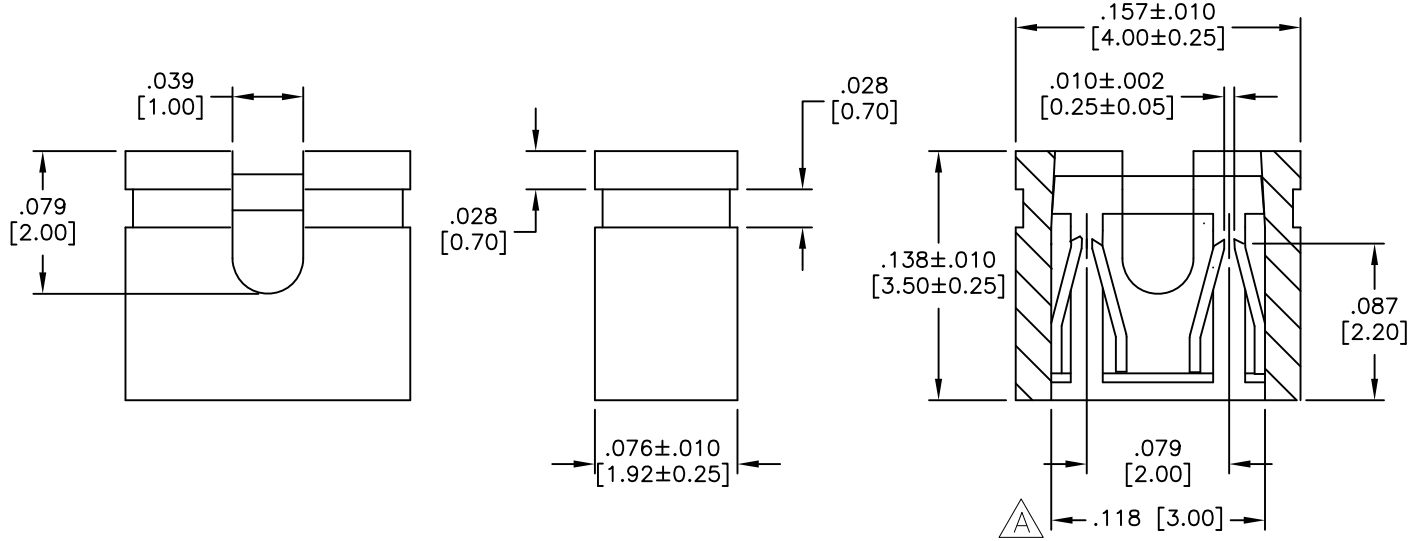

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Red
Contacts: Phosphor Bronze
Plating:
G = Gold flash over Nickel underplate overall
T = Tin over Copper underplate overall
Electrical:
Current rating: 3 Amp
Contact resistance: 30 mohms max
Insulation resistance: 5,000 Mohms min
Dielectric withstanding voltage: 550 VAC volts RMS @ sea leve
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/5/19
CHECKED	NP	6/5/19
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.079 [2.00] MINI SHUNT, OPEN TOP
.138 [3.50] HEIGHT, 3AMP, RED

SIZE	PART NO.	REV.
X	MS2B-X-3A-R	A

REF:	SCALE:	SHEET
S00076T	NTS	1 OF 1