
Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/11	

APPROVED: _____

DATE: _____ TITLE: _____

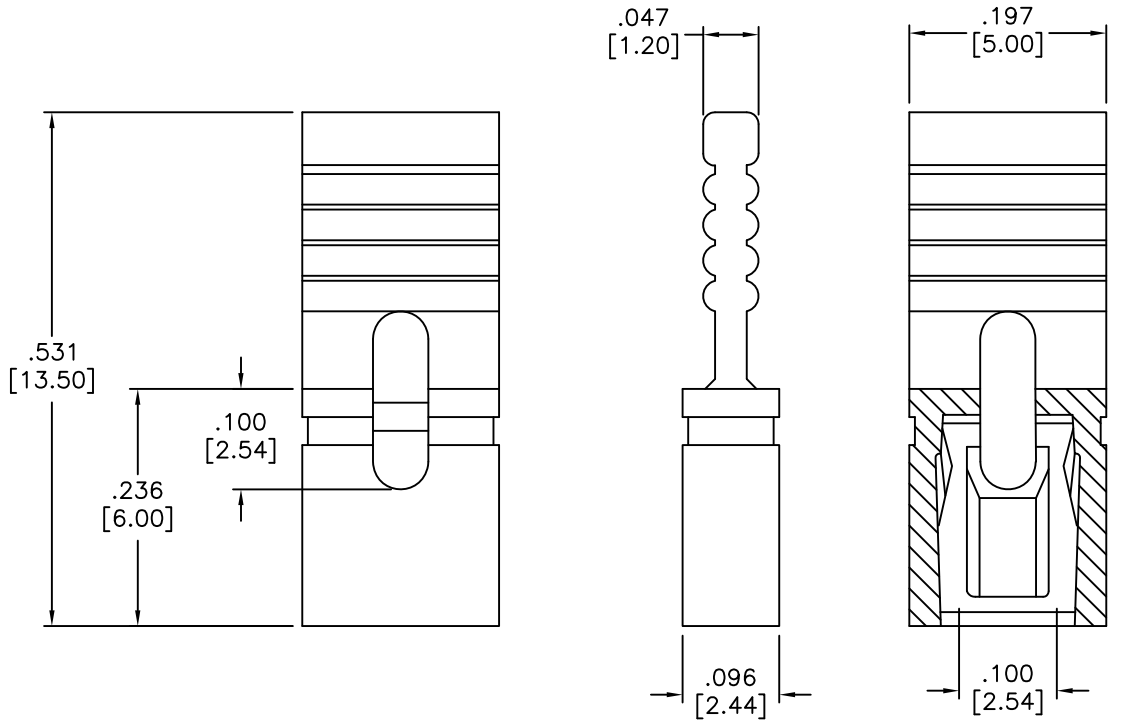

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: Red
Contacts: Phosphor Bronze
Plating:
G = Gold flash over Nickel underplate overall
T = Tin over Copper underplate overall
Electrical:
Current rating: 3 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 650 VAC for 1 minute
Temperature Rating:
Operating temperature: –55°C to +105°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/20/11
CHECKED	CC	9/20/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] MINI SHUNT, HANDLE TOP
.531 [13.50] HEIGHT, COLOR: RED

SIZE	PART NO.	REV.
X	MSBH-X-R	-

REF:	SCALE:	SHEET
S00076T	NTS	1 OF 1