

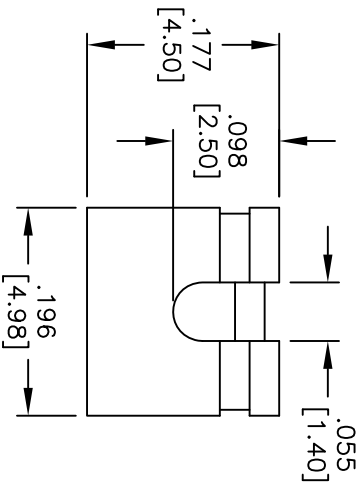



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/06/09	
A		REDRAWN	8/02/10	

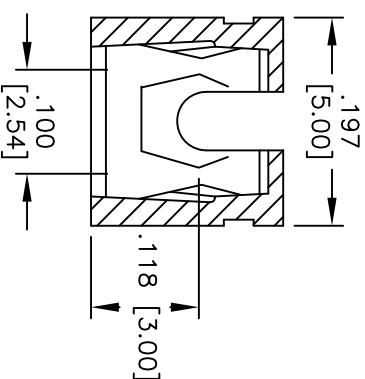

SPECIFICATIONS:

Material: Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: 30u" Gold over Nickel underplate overall
Electrical:
Current rating: 3 Amp max
Contact resistance: 30 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 650 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +105°C
Environmental:
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES
.X ± .10 ØX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

TITLE
.100 [2.54] MINI SHUNT, OPEN TOP
.177 [4.50] HEIGHT

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	DY	8/02/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	MSC-G-30	-
REF: S00076T	SCALE: NTS	SHEET 1 OF 1