

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	03/21/05	
A		REVISED DIM.	3/05/09	
B		UPDATE DRAWING	6/18/26	LH/MC

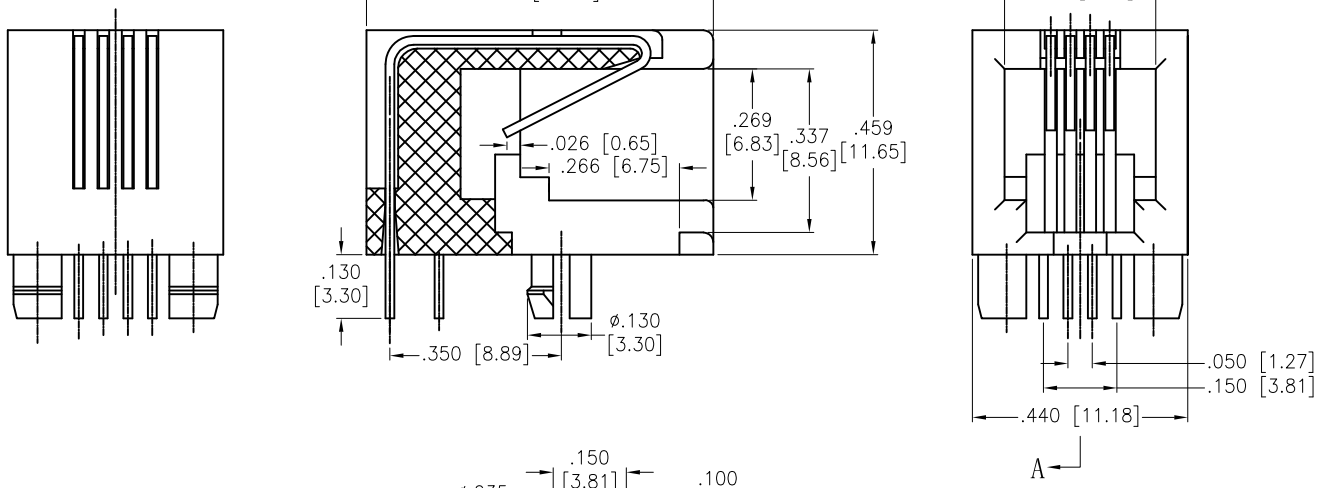

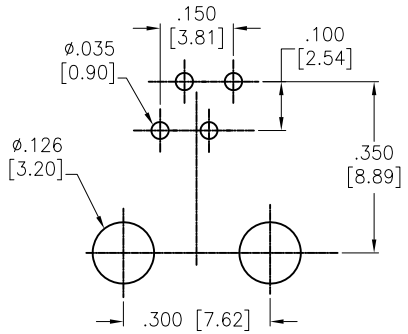

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Hi-Temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Round contact
Xu" Gold over Nickel underplate overall
Electrical:
Voltage rating: 125V AC RMS
Current rating: 1.5 Amp
Contact resistance: 20 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000V AC or 1500V DC for 1 Minute
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	.X	± .10	HOLES Ø.X	±.10
	.XX	± .020	Ø.XX	±.015
	.XXX	± .015	Ø.XXX	±.010

DRAWN	SS	03/21/05
CHECKED		
APPROVED		

CONFIDENTIAL AND PROPRIETARY
© Adam Tech. All rights reserved. This document contains confidential and proprietary information belonging to Adam Tech. It is provided solely for design and reference purposes by authorized parties. Any reproduction, distribution, display, or disclosure to third parties, in whole or in part, without the prior written consent of Adam Tech, is strictly prohibited. Adam Tech retains all rights, including copyright, trademark, trade secret, and all other intellectual property rights worldwide.

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
adam-tech.com

TITLE: MODULAR TELEPHONE JACK, 4P4C RIGHT ANGLE, PCB, HI-TEMP

SIZE	PART NO.	REV.
X	MTJ-445X1-HT	B

REF:	SCALE:	SHEET
S00005C	NTS	1 OF 1