


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/12/09	


APPROVED: _____

DATE: _____ TITLE: _____



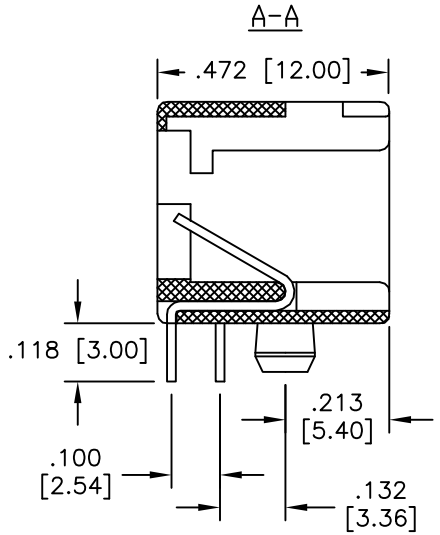

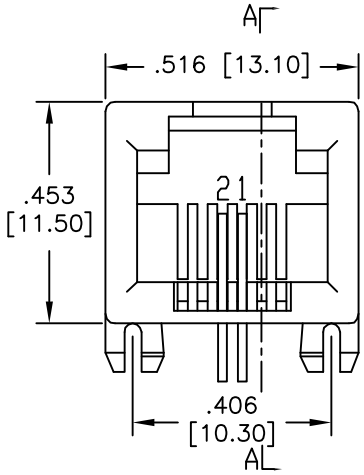

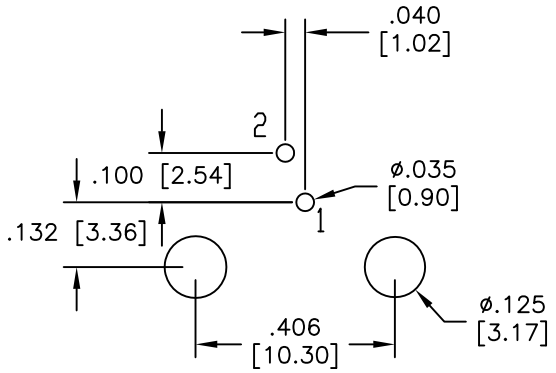

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:
Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze

Plating:
Gold over Nickel underplate on contact area,
Tin over copper underplate on soldier tails.

Electrical:
Operating voltage: 125 VAC max
Current rating: 1.5 Amps max
Contact resistance: 35 mohms max. initial
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:
Operating temperature: 0°C to +70°C

Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	8/12/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR TELEPHONE JACK, R/A, 6P2C

SIZE	PART NO.	REV.
X	MTJ-62QX1	-

REF: S00005C | SCALE: NTS | SHEET 1 OF 1