


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/22/13	
A		UPDATE DRAWING	8/30/18	AY/RC




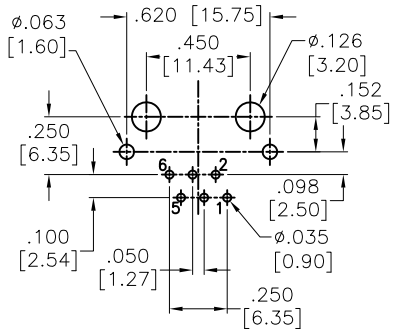

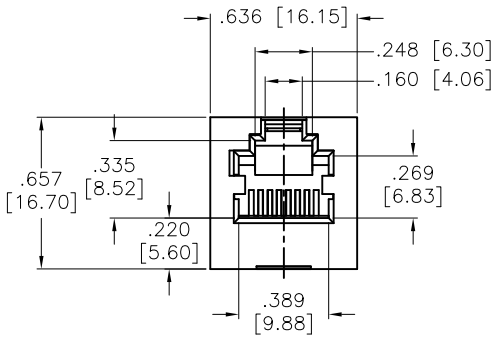

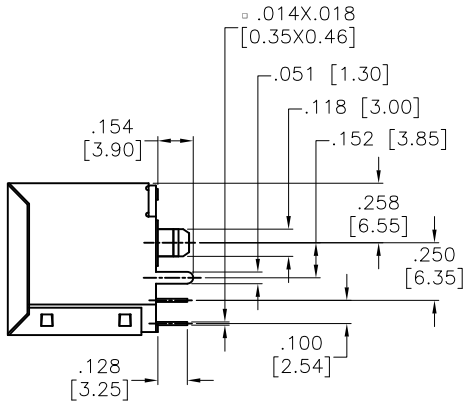





DETAIL Z
SCALE 2:1

SPECIFICATIONS:
Material:
Insulator: PBT, glass reinforced, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shell: Brass, Nickel plated
Contact Plating:
Gold over Nickel underplate on contact area,
Gold Flash over Nickel underplate on on solder tails
Electrical:
Voltage rating: 150 VAC max
Current rating: 1.5 Amps max
Contact Resistance: 20 mohms max
Insulation resistance: 500 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1,500 Vrms for 1 minute
Temperature Rating:
Operating temperature: -40°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/22/13
CHECKED	YC	8/22/13
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
MODULAR TELEPHONE JACK, 6P6C
SHIELDED, TOP ENTRY, PCB TYPE

SIZE	PART NO.	REV.
X	MTJ-66FX1-FSN	A

REF:	SCALE:	SHEET
S00065T	NTS	1 OF 1