


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	10368	RELEASED	11/20/15	SS
A		ADDEDD PCB LAYOUT PAD DIM	01/05/18	SS

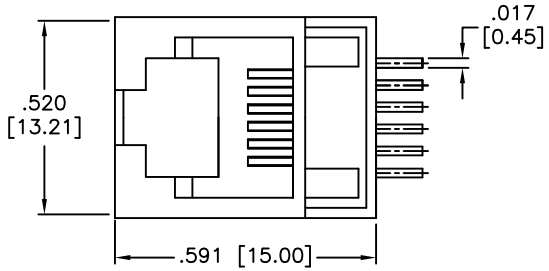

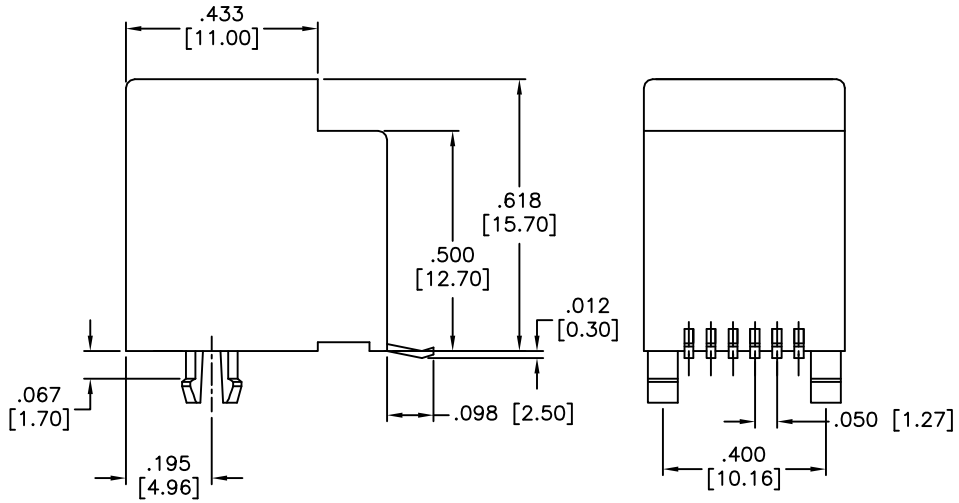

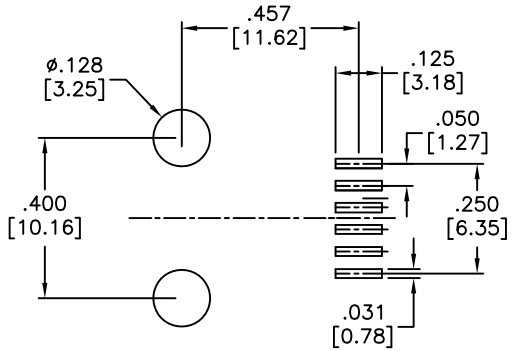

RECOMMENDED PCB LAYOUT
(TOP VIEW)

X	PLATING
0	15 µin Gold
1	30 µIn Gold
2	50 µin Gold

SPECIFICATIONS:
Material:
Insulator: Hi–temp thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold over Nickel underplate on contact area,
Tin over Copper underplate on tails.
(See chart for thickness)
Electrical:
Operating voltage: 125 VAC max
Current rating: 1.5 Amps max
Contact resistance: 45 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
Operating temperature: –40°C to +85°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	11/20/15
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
MODULAR TELEPHONE JACK, 6P6C
TOP ENTRY, SMT TYPE

SIZE	PART NO.	REV.
X	MTJ-66KX1J	A

REF: S00156T | SCALE: NTS | SHEET 1 OF 1