

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/19/19	
A		UPDATE DRAWING	3/26/24	WX/MC




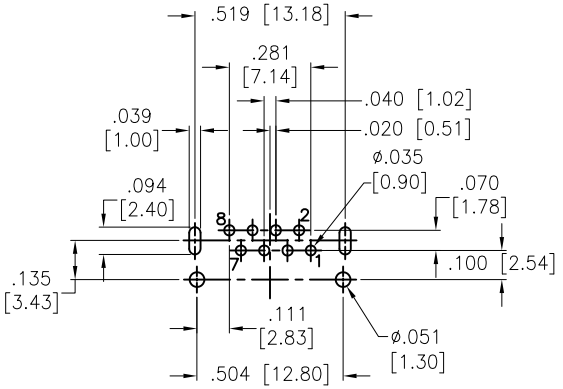


RECOMMENDED PCB LAYOUT

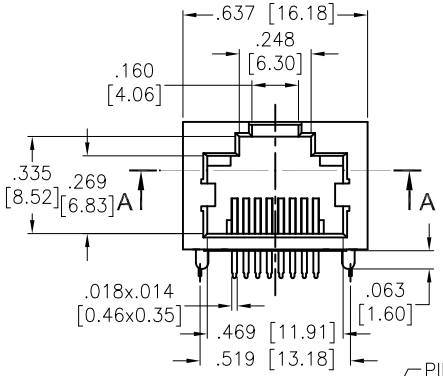

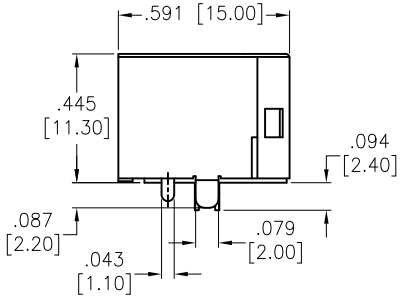

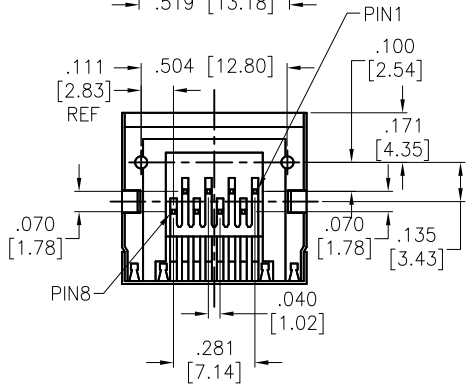



SECTION A–A

SPECIFICATIONS:
Material:
Housing: Hi–Temp Thermiplastic, rated UL 94V–0
Housing color: Black
Insert Housing: Hi–Temp Thermiplastic, rated UL 94V–0, Color: Black
Contacts: Phosphor Bronze
Shield: Brass, Nickel plated
Plating:
Gold over Nickel underplate overall
Electrical:
Voltage Rating: 150 VAC max
Current rating: 1.5 Amps max
Contact Resistance: 20 mohms max.
Insulation resistance: 500 Mohms min @500 VDC
Dielectric withstanding voltage: 1500 Vrms for 1 minut
Temperature Rating:
Operating temperature: –40°C to +85°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	AY	1/19/19
CHECKED	LW	1/19/19
APPROVED		

TITLE: MODULAR TELEPHONE JACK, 8P8C
RIGHT ANGLE, FULL SHIELD

SIZE	PART NO.	REV.
X	MTJ-88AAUX1-FSM-HT-T/R	A

REF: S00065T | SCALE: NTS | SHEET 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH