

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/16	


APPROVED: _____


DATE: _____ TITLE: _____

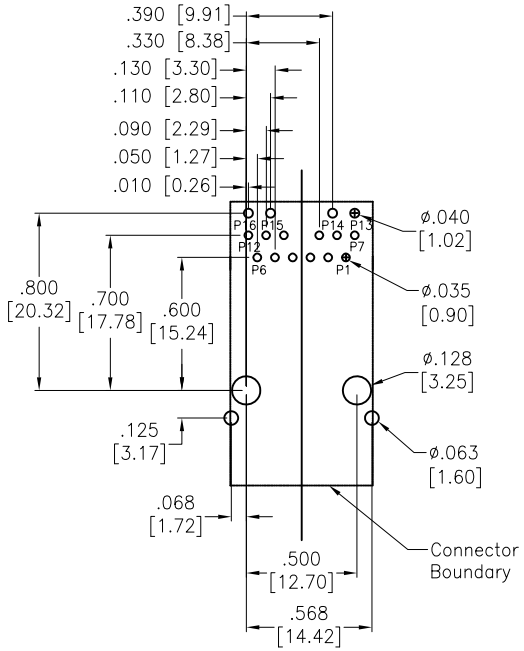

RECOMMENDED PCB LAYOUT

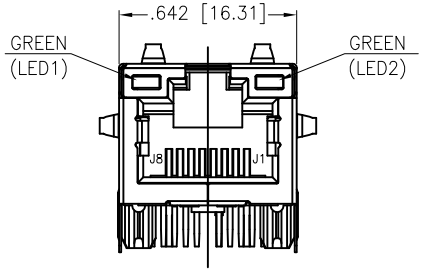

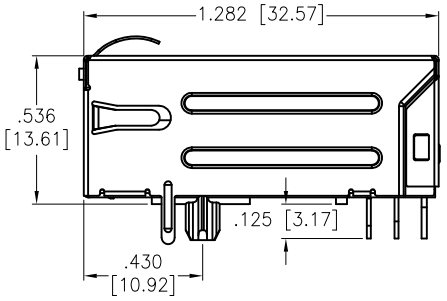

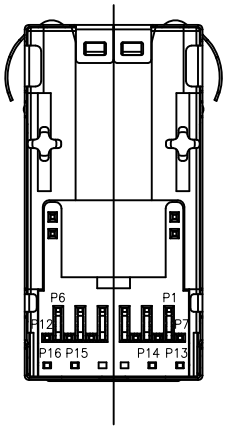

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold
6	6 µIn Gold

SPECIFICATIONS:
Material:
Housing: Thermoplastic, rated UL 94V–0
Housing Color: Black
Contacts: Phosphor Bronze
Shield: Brass, Nickel plated
Plating:
Round contact
Gold over Nickel underplate overall
Flat contact
Gold over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
(See chart for thickness)
Electrical:
Voltage rating: 150 VAC
Contact resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 2,250 VDC for 1 minute
Temperature Rating:
Operating temperature: 0°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/3/16
CHECKED	CH	8/3/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK, 1 PORT, 8P8C
W/ LED1 GREEN, LED2 GREEN


SIZE	PART NO.	REV.
X	MTJ-88CX1-FSP-PG-LD-M49C	-


REF: S00005C | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

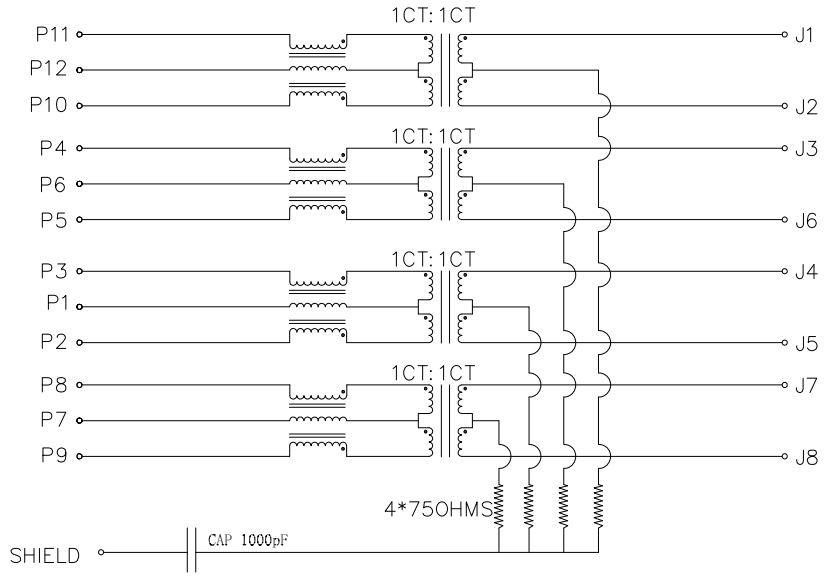



Pin	Green		Green
P13	–	P15	–
P14	+	P16	+

Electronical Specifications:

1. Turn Ratio @100KHz: (P11~P10):(J1~J2) = 1:1±5%
   (P4~P5):(J3~J6) = 1:1±5%
   (P3~P2):(J4~J5) = 1:1±5%
   (P8~P9):(J7~J8) = 1:1±5%
2. Primary Inductance: 350uH MIN @100KHZ,0.1V 8mA DC BIAS
3. DC Resistance: 1.2 OHMS MAX
4. Insertion Loss: 1–100MHz –1.0dB MAX
   100–125MHz –1.2dB MAX
5. Return Loss: 1–40MHz –16dB MIN
   40–60MHz –12dB MIN
   60–80MHz –10dB MIN
   80–100MHz –8dB MIN
6. CROSS TALK: 1–100MHz –30dB MIN
7. COMMON TO COMMON MODE ATTENUATION: 1–100MHz –30dB MIN
8. Isolation: PHY Side to Line Side: 2250VDC

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/3/16
CHECKED	CH	8/3/16
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK, 1 PORT, 8P8C
W/ LED1 GREEN, LED2 GREEN

SIZE	PART NO.	REV.
X	MTJ-88CX1-FSP-PG-LD-M49C	-

REF: S00005C | SCALE: NTS | SHEET 2 OF 2