

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/17/09	
A		UPDATE DRAWING	7/14/17	AY/IC

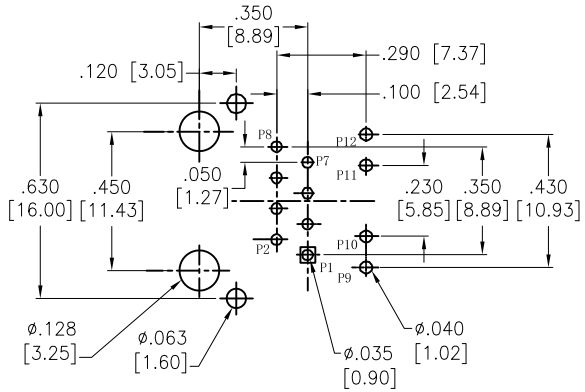

RECOMMENDED P.C.B LAYOUT

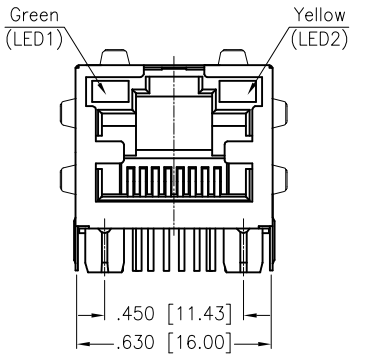

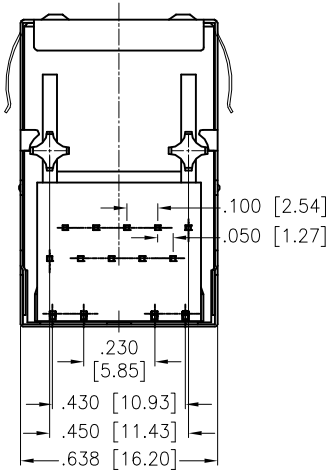

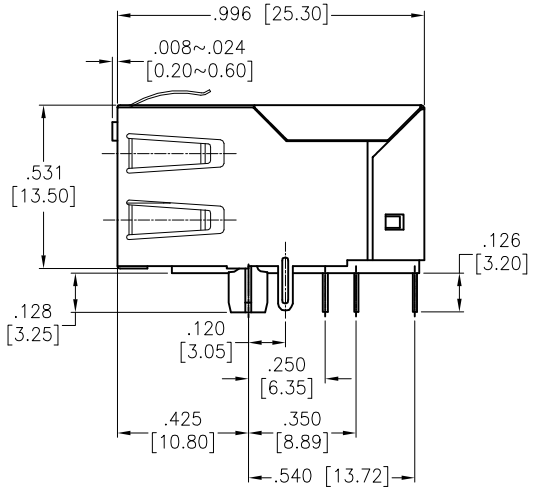

Material:
Housing: PA66, rated UL 94V-0, Color: Black
Inserter: PBT, rated UL 94V-0, Color: Black
Contacts: Copper Alloy
Shield: Brass, Nickel plated
Plating:
Round contact
Gold over Nickel underplate overall
Flat contact
Gold over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
(See chart for thickness)
Electrical:
Voltage rating: 150 VAC
Contact Resistance: 20 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 1500VAC or 2250VDC
Temperature Rating:
Operating temperature: 0°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold
6	6 µin Gold

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/17/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 1 PORT, 8P8C
W/ LED1 GREEN, LED2 YELLOW


SIZE	PART NO.	REV.
X	MTJ-88SX1-FSD-PG6-LH-M3	-

REF: S00005C | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

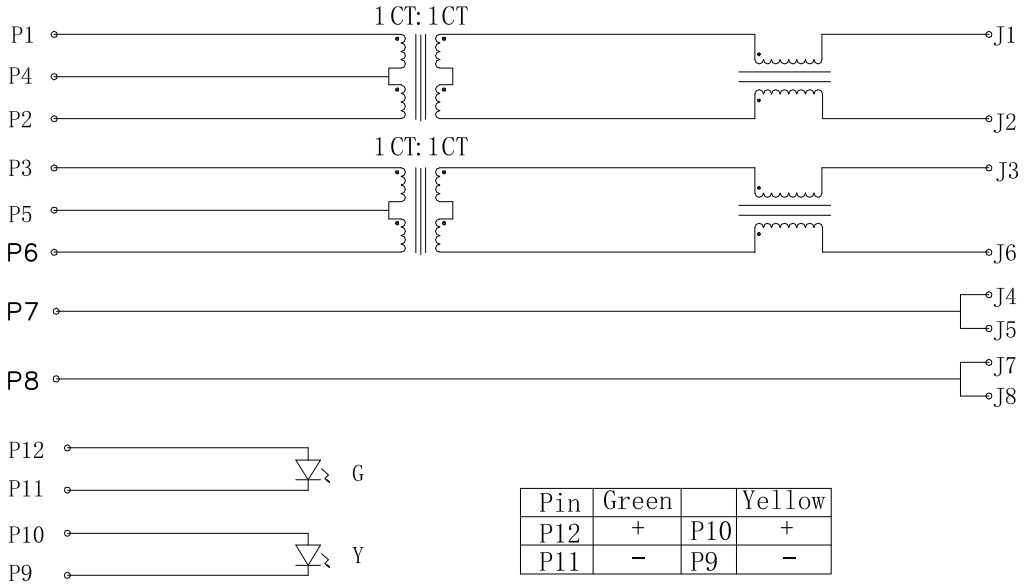

Pin	Green		Yellow
P12	+	P10	+
P11	−	P9	−

Electronical Specifications:

1. Turn Ratio @100KHz: (P1~P2):(J1~J2) = 1:1±5%
   (P3~P6):(J3~J6) = 1:1±5%
2. Primary Inductance: 350uH MIN @100KHZ,0.1V 8mA DC BIAS
3. DC Resistance:(J1~J2):(J3~J6) 1.2 OHMS MAX
4. Insertion Loss: 1−100MHz −1.2dB MAX
5. Return Loss: 1−30MHz −16dB MIN
   30−60MHz −12dB MIN
   60−80MHz −10dB MIN
6. CROSS TALK: 1−100MHz −30dB MIN
7. COMMON TO COMMON MODE ATTENUATION: 1−100MHz −30dB MIN
8. Isolation: PHY Side to Line Side: 1500VAC or 2250VDC
9. DC CURRENT/VOLTAGE RATING−PSE PINS: 350mA @57V(CONTINUOUS)

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/17/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 1 PORT, 8P8C
W/ LED1 GREEN, LED2 YELLOW

SIZE	PART NO.	REV.
X	MTJ-88SX1-FSD-PG6-LH-M3	A

REF: S00005C | SCALE: NTS | SHEET 2 OF 2