

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/1/15	

APPROVED: _____

DATE: _____ TITLE: _____

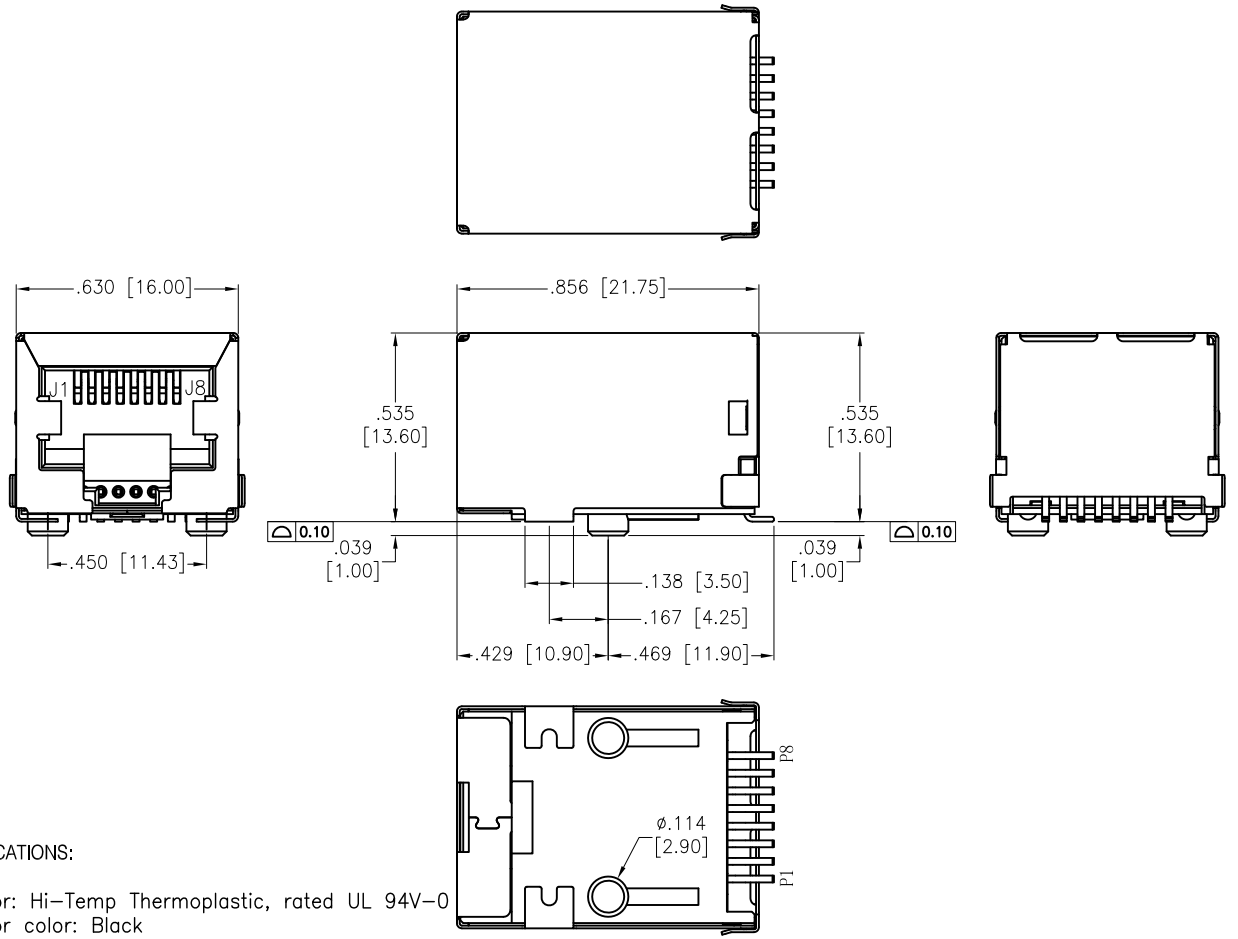

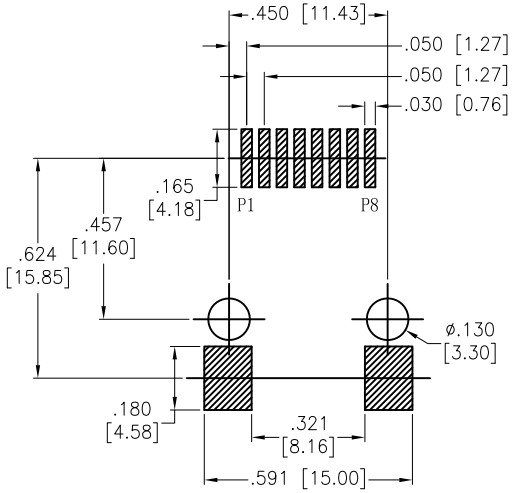

RECOMMENDED PCB LAYOUT
(TOP VIEW)

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Shield: Copper Alloy, Nickel plated
Cantacts Plating:
Round contact
Gold over Nickel underplate overall
Flat contact
Gold over Nickel underplate on contact area,
Tin over Nickel underplate on solder tails
(See chart for thickness)
Electrical:
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 1,500 VAC or 2,250 VDC for 1 minut
Temperature Rating:
Operating temperature: -0°C to +70°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold
6	6 µin Gold

PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	9/1/15
CHECKED	TW	9/1/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 1 PORT, 8P8C
FULL SHIELD, SURFACE MOUNT TYPE


SIZE	PART NO.	REV.
X	MTJ-88TX1-FS-M4Y-SMT-T/R	-

REF: S00101C | SCALE: NTS | SHEET 1 OF 2

Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

APPROVED: _____

DATE: _____ TITLE: _____

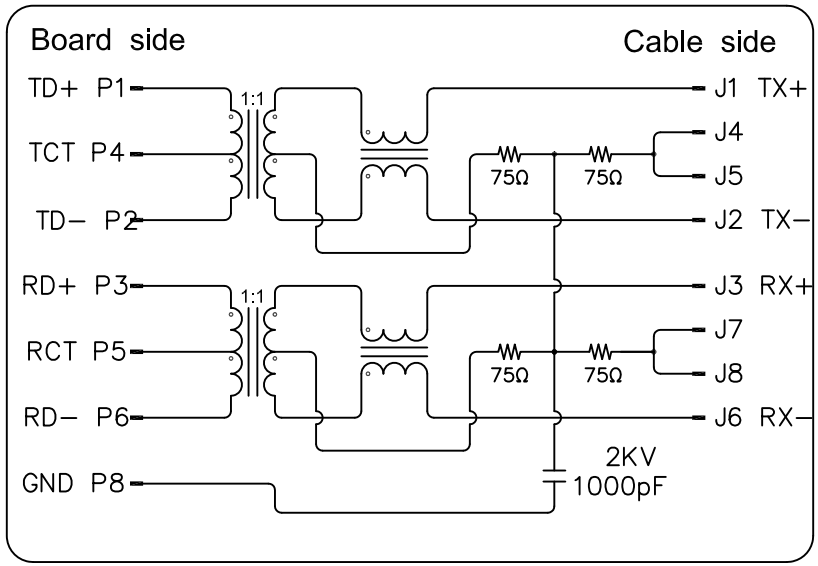

ELECTRICAL CHARACTERISTICS :

1. INSERTION LOSS :
   - 1~100 MHZ −1.0dB MAX.

2. RETURN LOSS(LOAD 100Ω) :
   - 1~30 MHZ −18dB MIN
   - 30~60 MHZ −16dB MIN
   - 60~80 MHZ −10dB MIN

3. COMMON MODE REJECTION
   - 1~100 MHZ −30dB MIN

4. CROSS TALK
   - 1~100 MHZ −30dB MIN

5. INDUCTANCE @ 100KHZ, 0.1V, 8MA DC BIAS
   - (P1−P2),(P3−P6) : 350 uH MIN

6. DCR
   - (J1−J2),(J3−J6) : 1.2 Ohm MAX

7. HI−POT TEST
   - PCB SIDE TO CABLE SIDE : 1500VAC 60S OR 2250VDC 60S

8. TURNS RATION 100KHZ
   - (P1−P2) : (J1−J2) = 1:1 ±%5
   - (P3−P6) : (J3−J6) = 1:1 ±%5

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/26/15
CHECKED	TW	8/26/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MODULAR JACK GANGED, 1 PORT, 8P8C FULL SHIELD, SURFACE MOUNT TYPE

SIZE	PART NO.	REV.
X	MTJ-88TX1-FS-M4Y-SMT-T/R	-

REF: S00101C | SCALE: NTS | SHEET 2 OF 2