
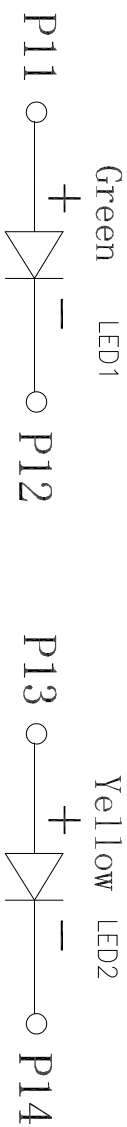


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/11/14	

APPROVED: _____
DATE: _____ TITLE: _____

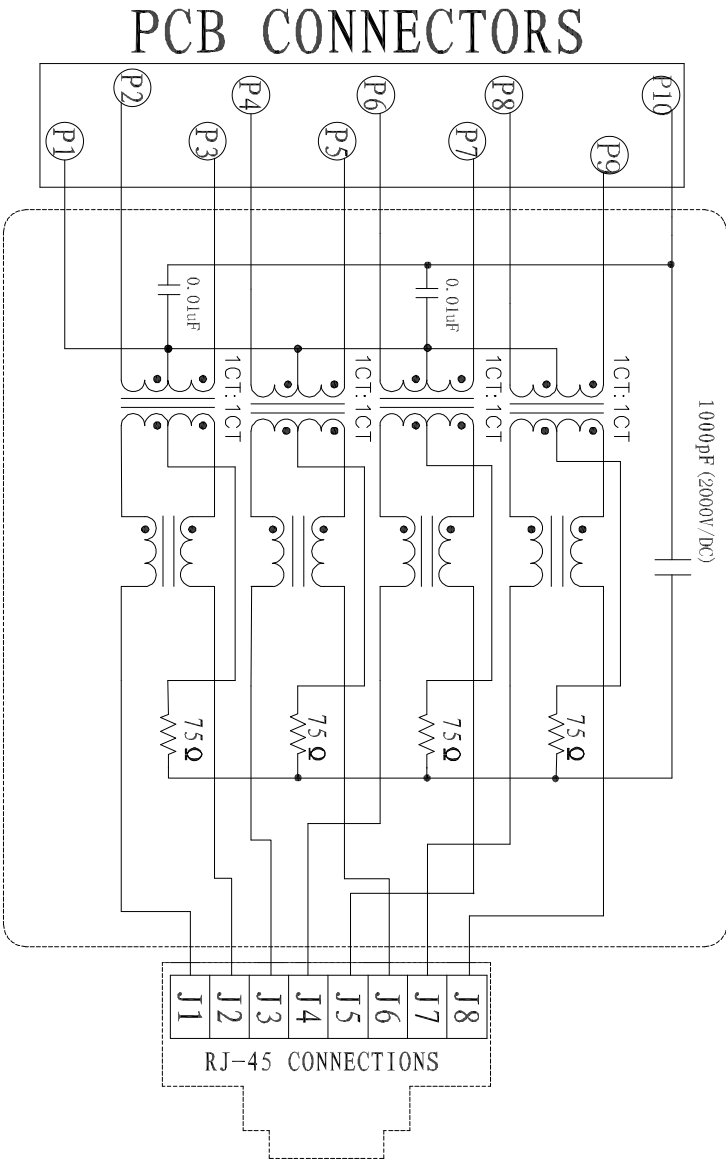

- ELECTRICAL SPECIFICATIONS @ 25°C
- 1.1 Isolation Voltage: 1500 VAC (Input to Output)
 - 1.2 OCL: 350uH min @ 100 KHz, 100mV, 8mA DC
 - 1.3 Insertion Loss: 100KHz TO 100MHz : -1.2dB Max.
 - 1.4 Return Loss: 1MHz to 30MHz: -18 dB min
30MHz to 60MHz: -14 dB min
60MHz to 80MHz: -12 dB min
 - 1.5 Common Mode Rejection: -30dB min @ 1MHz-100MHz
 - 1.6 Cross Talk: 1MHz to 100MHz: -30dB min.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Ratway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES		HOLES		TITLE MODULAR JACK GANGED, 1 PORT, 8P8C W/LED 1 GREEN, LED 2 YELLOW			
.X	± .10	Ø.X	± .10	SIZE PART NO.			
.XX	± .020	Ø.XX	± .015	MTJ-88TX1-FSD-PG-LH-M235W			
.XXX	± .015	Ø.XXX	± .010	SCALE: NTS			
APPROVALS				SHEET 2 OF 2			
DRAWN	HR	DATE		REV: A			
CHECKED	SY	6/11/14		REF: S0025T			
APPROVED							