

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

Date

Appr

-

RELEASED

12/17/15

D

D

C





C

B

B

A

A

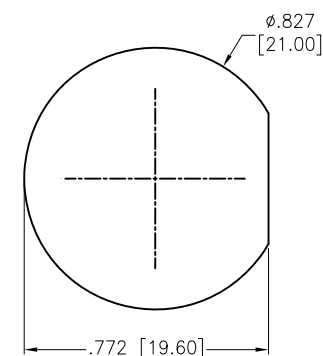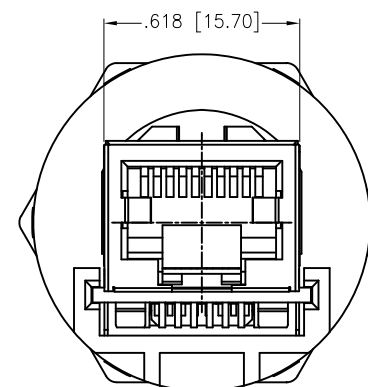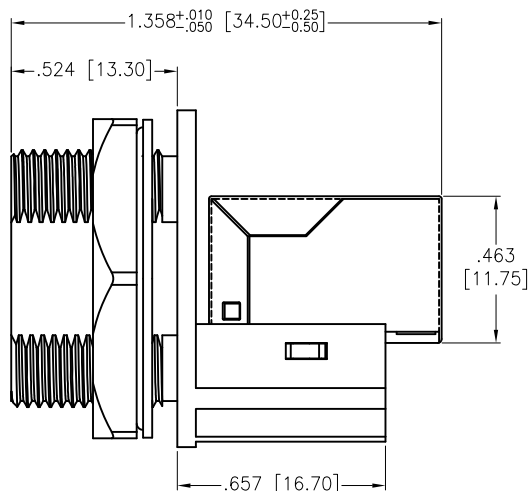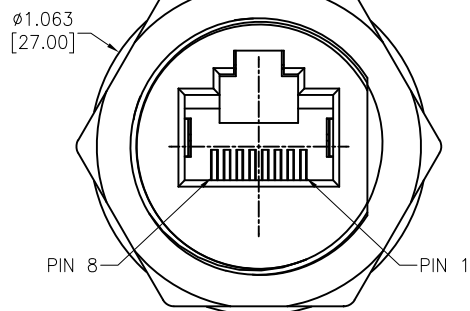

RECOMMENDED PANEL CUT
PANEL THICKNESS: .059~.079 [1.50~2.00]

SPECIFICATIONS:

Material:

Insulator: Engineering Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze, Gold plated

Nut: Engineering Thermoplastic, rated UL 94V-0

Gasket: Silicon

Electrical:

Operating voltage: 125 VAC max.

Current rating: 1.5 Amps max.

Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Leade free, RoHS Compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DATE

DRAWN

HR

12/17/15

CHECKED

TW

12/17/15

APPROVED

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

RJ45 COUPLER, 8P8C, BULK HEAD
MOUNT, WATER PROOF, COLOR BLACK

SIZE

X

PART NO.

MTJC-88-RPM-WP-01

REV.

-

REF: S00134T

SCALE: NTS

SHEET 1 OF 1

6

5

4

3

2

1