

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	1.19/06	
A		REDRAWN	10/31/11	
B		REDRAWN	7/18/13	
C		ADDED DRAWING	6/15/17	AY/AC
D		UPDATE DIM.	3/21/18	AY/LW
E		UPDATE DRAWING	7/25/18	AY/DH
F		UPDATE DRAWING	7/6/23	WX/MC

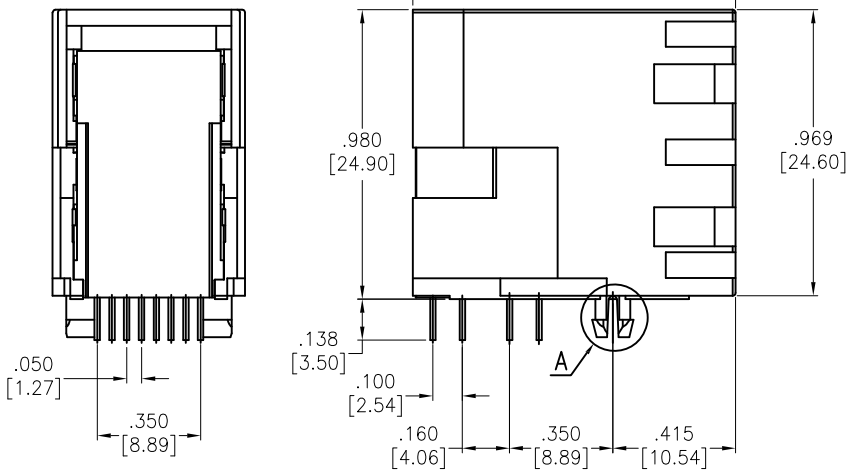

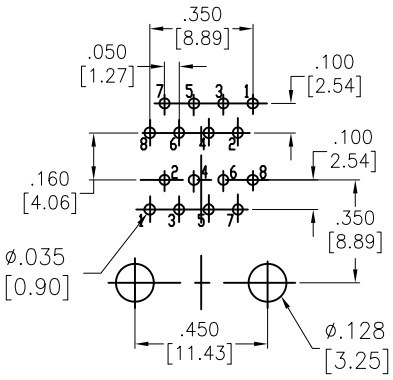

RECOMMENDED PCB LAYOUT





DETAIL A

SPECIFICATIONS:
Material:
Insulator: PBT, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Round contact
Gold over Nickel underplate overall
Electrical:
Voltage rating: 150 VAC RMS
Current rating: 1.5 Amp
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage:
Contact to Contact: 1,000 VDC/AC Peak for 1 minute
Temperature Rating:
Operating temperature: –40°C to +85°C
Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	SS	1/19/06
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: MODULAR JACK, 2 PORT, 8P8C STACKED PCB

SIZE	PART NO.	REV.
X	MTJG-2-88JX1	F

REF: S00005C | SCALE: NTS | SHEET 1 OF 1