
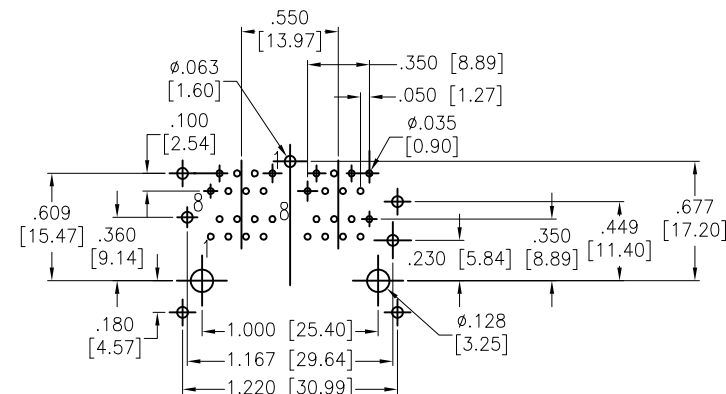




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/2/05	
A		REDARWN	02/17/12	
B		REDARWN	7/13/12	
C		UPDATED DRAWING	6/14/17	HR/NC
D		UPDATED SPEC.	12/5/19	AY/IW
E		UPDATED SPEC.	3/9/21	WX/TL

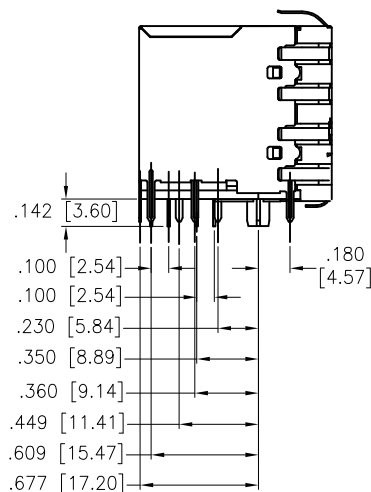

SPECIFICATIONS:

Material:

Housing: PBT, rated UL 94V-0, Color: Black

Contacts: Phosphor Bronze

Shield: Brass, Nickel plated

Plating:

Round contact

Gold over Nickel underplate overall

Flat contact

Gold over Nickel underplate on contact area

Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 150 VAC RMS

Current rating: 1.5 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms min @ 500VDC

Dielectric withstanding voltage:

Contact to Contact: 1,000 VDC or AC Peak for 1 minute

Contact to Shield: 1,500 VDC or AC Peak for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	SS	5/2/05
CHECKED		
APPROVED		

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

2X2 PORT GANGED STACKED JACK, 8P8C

SIZE	PART NO.	REV.
X	MTJG-4-88JX1-FSG-PG	E
REF:	S00005C	SCALE: NTS
SHEET 1 OF 1		