
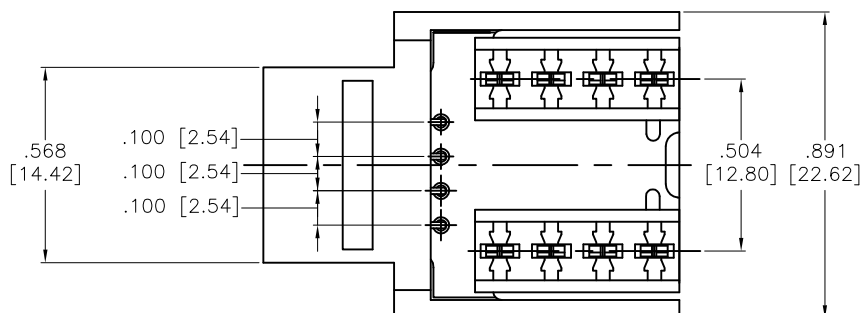
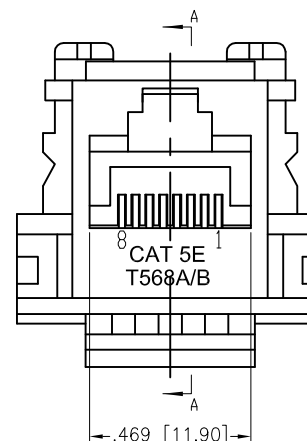


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/14/17	
A		ADDED PRINT	1/4/18	AY/TY

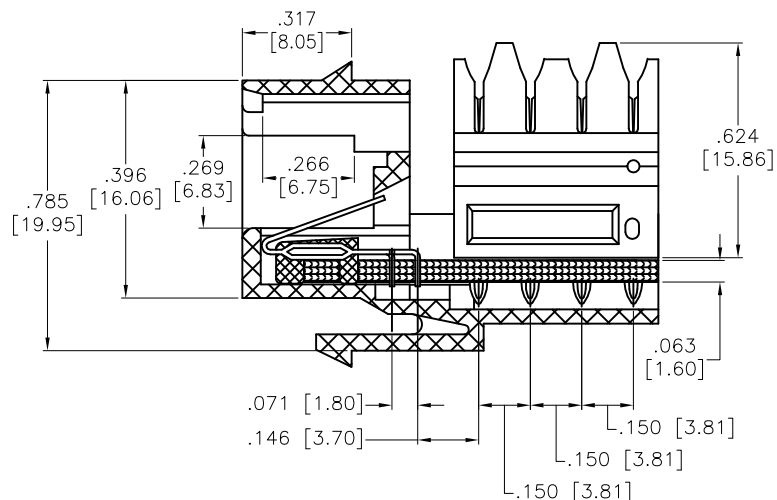

SPECIFICATIONS:

Material:

Housing: ABS, rated UL 94V-0, Color: White

Contacts: Phosphor Bronze

Plating:

50u" Gold over Nickel underplate on contact area.

Electrical:

Voltage rating: 150 VAC RMS

Current rating: 1.5 Amps

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 100 VDC

Dielectric withstanding voltage:

Contact to Contact: 1,000 VDC or AC Peak

Contact to Shield: 1,500 VDC or AC Peak

Temperature Rating:

Operating temperature: 0°C to +70°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS		DATE
DRAWN	HR	12/14/17
CHECKED	TY	12/14/17
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
MODULAR KEYSTONE JACK, 8P8C, COLOR: WHITE

SIZE X	PART NO. MTJK-88-02-C5E-50	REV. A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1