
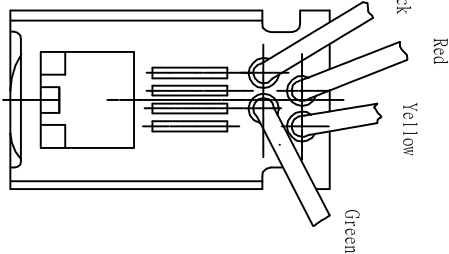
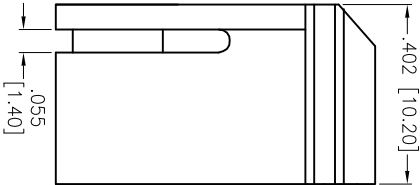



APPROVED: _____
DATE: _____ TITLE: _____

THIS IS A CUSTOM CABLE PRODUCT THAT IS NON-CANCELABLE / NON-RETURNABLE

Rev	AWO #	Description	Date	Appr
-	9929	RELEASED	12/18/09	
A		REDRAWN	05/24/12	

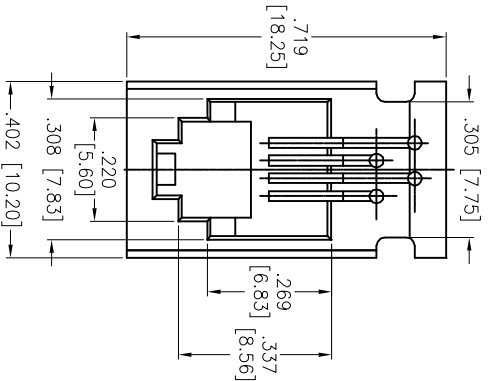

Black & Green Line: .382±.004 [9.70±0.10]
Red & Yellow: .441±.004 [11.20±0.10]



Striped & Tinned
.256±.039
[6.50±1.00]

X	PLATING
0	15 μ" Gold
1	30 μ" Gold
2	50 μ" Gold

SPECIFICATIONS:

Material:

Insulator: ABS, rated UL 94V-0

Insulator color: Deep Grey

Contacts: Phosnor Bronze

Wire: 26 Awg, UL 1061

PVC Coated

Plating:

Gold over Nickel underplate on mating area

(See plating chart for thickness)

Electical:

Operation voltage: 150 VAC max

Current rating: 1.5 Amps max

Insulation resistance: 1000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC for 1 minute

Environmental:

Operating temperature: -40°C to +70°C

Lead free, RoHS compliant.

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

WIRED JACK, 616L, PANEL MOUNT

COLOR GRAY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
.X	± .10	ØX	± .10	TITLE WIRED JACK, 616L, PANEL MOUNT COLOR GRAY			
.XX	± .020	ØXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	DR	12/18/09		SIZE PART NO. REV. X MTP-616L-X-A1-2 A			
CHECKED							
APPROVED							
REF: S00005C				SCALE: NTS			
				SHEET 1 OF 1			