
Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/10	
A		UPDATE DRAWING	1/28/21	LH/KL

APPROVED: _____

DATE: _____ TITLE: _____

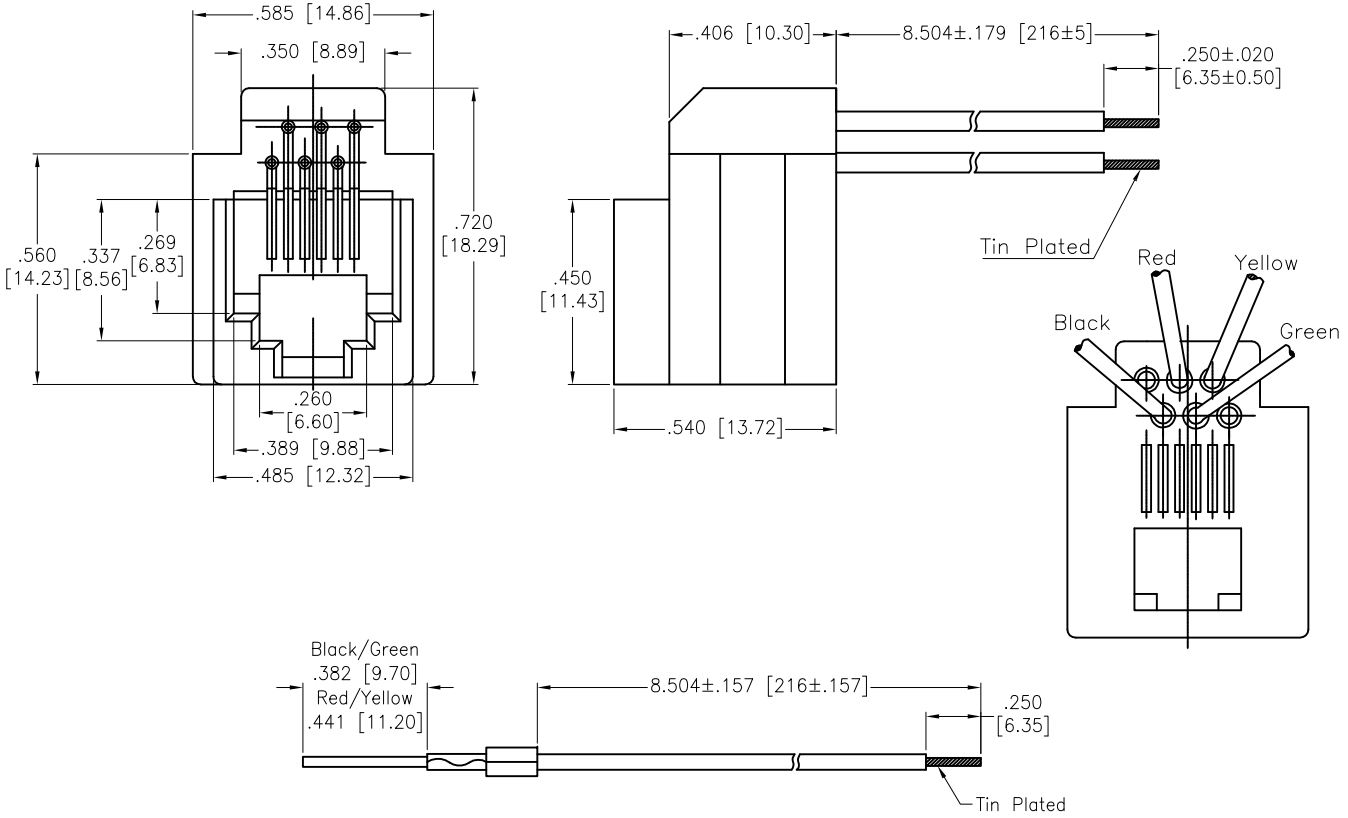

SPECIFICATIONS:

Material:
Insulator: ABS, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Wires: 26 Awg, UL 1061

Plating:
Gold over Nickel underplate on contact area.

Electrical:
Voltage rating: 125 VAC max
Current rating: 1.5 Amp
Contact resistance: 20 mohms
Insulation resistance: 1000 Mohms min @500 VDC
Dielectric withstanding voltage: 1000 VAC or 1500 VDC for 1 minute

Temperature Rating:
Operating temperature: –0°C to +70°C

Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/25/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: WIRE LEADED JACK, 623 K4, BLACK
8.5" LEADS, STRIPPED AND TINNED .250"

SIZE	PART NO.	REV.
X	MTJP-623-K4-X-B1-1	A

REF: S00005C | SCALE: NTS | SHEET 1 OF 1