


Rev	AWO #	Description	Date	Appr
-	5002	RELEASED	05/25/05	

APPROVED: _____

DATE: _____ TITLE: _____

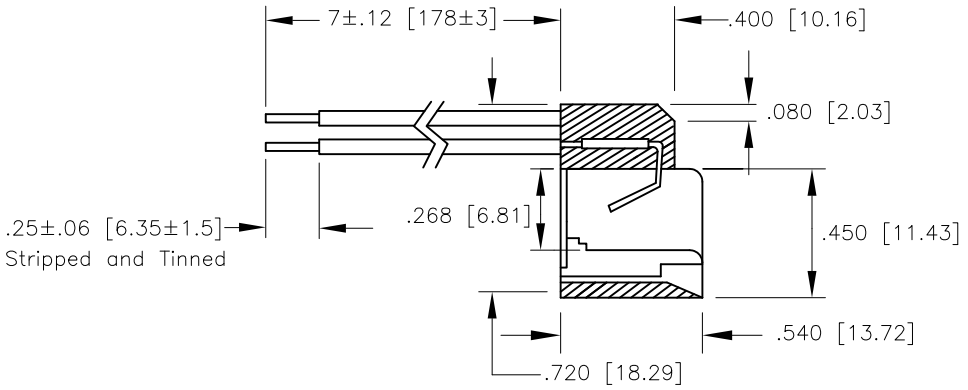

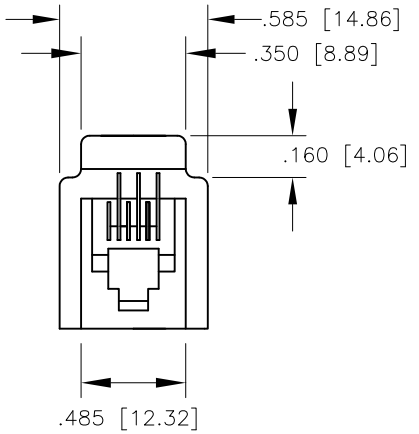



"X"	PLATING
0	15 µ" Gold
1	30 µ" Gold
2	50 µ" Gold

SPECIFICATIONS:

Material:
Insulator: ABS, rated UL 94V–0
Insulator color: Medium Gray
Contacts: Phosphor Bronze
Wires: 26 Awg, UL 1061, 80°C, VW–1, 300V

Plating:
Gold over Nickel underplate on contact area.
(See chart for thickness)

Electrical:
Operating voltage: 150 VAC max
Current rating: 1.5 Amps max
Contact resistance: 20 mohms
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:
Operating temperature: –40°C to +125°C

Environmental:
Lead free, RoHS compliant. RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/19/06
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED JACK, 623 K6, GRAY
7" LEADS, STRIPPED AND TINNED .250"

SIZE	PART NO.	REV.
X	MTJP-623-K6-X-A1-2	-

REF: | SCALE: NTS | SHEET 1 OF 1