



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/28/06	

APPROVED: _____

DATE: _____ TITLE: _____

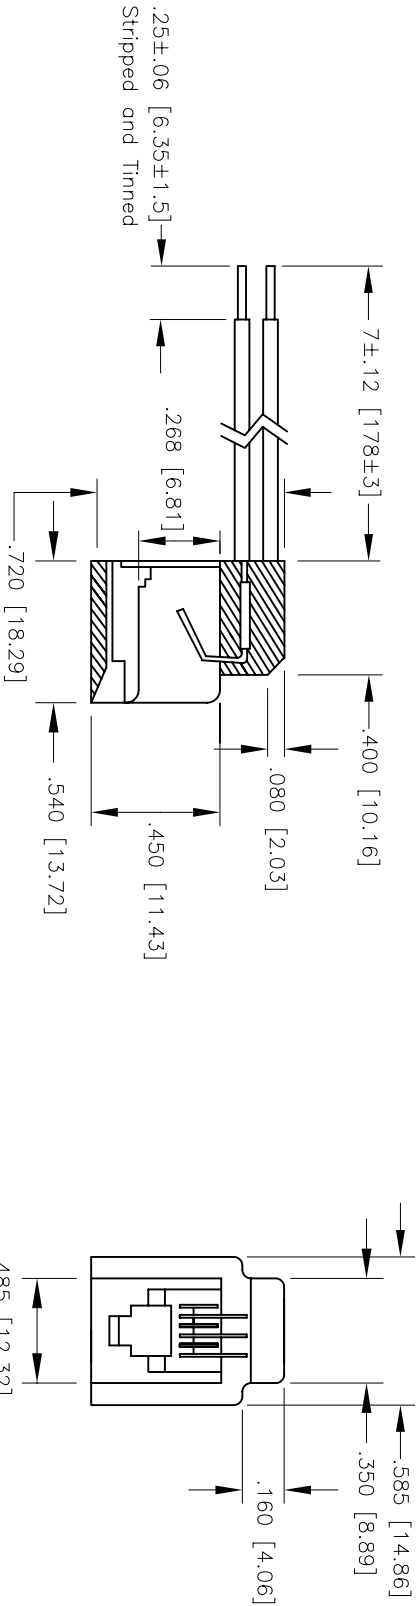

"X"	PLATING
0	15 μ " Gold
1	30 μ " Gold
2	50 μ " Gold



SPECIFICATIONS:

Material:

Insulator: ABS, rated UL 94V-0

Insulator color: Medium Gray

Contacts: Phosphor Bronze

Wires: 26 Awg, UL 1061, 80°C, VW-1, 300V

Plating:

Gold over Nickel underplate on contact area.

(See chart for thickness)

Electrical:

Operating voltage: 150 VAC max

Current rating: 1.5 Amps max

Contact resistance: 20 mohms

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X $\pm$.10 $\varnothing$.X $\pm$.10
.XX $\pm$.020 $\varnothing$.XX $\pm$.015
.XXX $\pm$.015 $\varnothing$.XXX $\pm$.010

APPROVALS

DATE

DRAWN SS 6/28/06

CHECKED

APPROVED

ADAM TECH

909 Ratway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE

WIRE LEADED JACK, 623 K4, GRAY

7" LEADS, STRIPPED AND TINNED .250"

SIZE PART NO.

MTJP-623K4-X-A1-2

REF:

SCALE: NTS

SHEET 1 OF 1