


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/12/09	
A		REDRAWN	9/23/11	

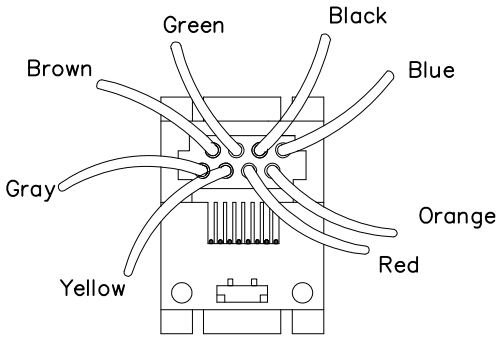



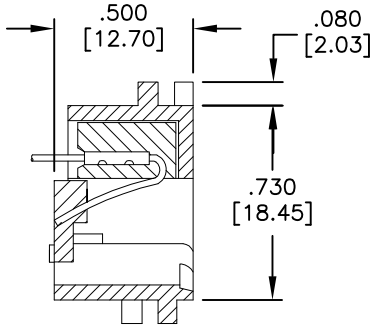

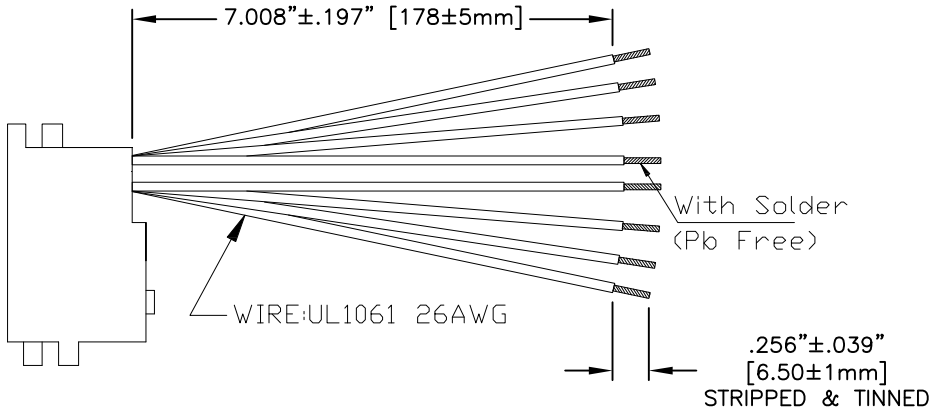

SPECIFICATIONS:

Material:

Insulator: ABS, rated UL 94V–0

Insulator color: Gray

Contacts: Phosphor Bronze

Wires: 26 AWG, Stranded, PVC insulated

Plating:

Gold over Nickel underplate on mating area.
(See chart for thickness)

Electrical:

Operating voltage: 150 VAC max.

Current rating: 1.5 Amps max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 500 Mohms min.

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: –40°C to +125°C

Environmental:

Lead free, RoHS compliant

RoHS COMPLIANT

X	PLATING
0	15 µ" Gold
1	30 µ" Gold
2	50 µ" Gold

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	5/12/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED TELEPHONE JACK, 26 AWG, 7" LEADS, .256 [6.50] STRIPPED & TINNED

SIZE	PART NO.	REV.
X	MTJP-641-X-A1-2	A

REF: S00020T | SCALE: NTS | SHEET 1 OF 1