
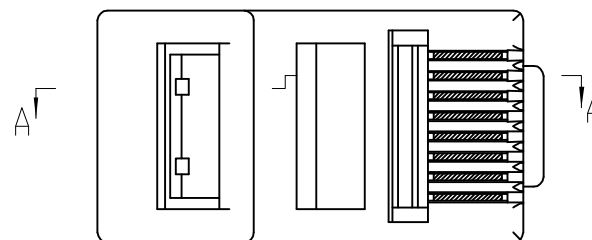
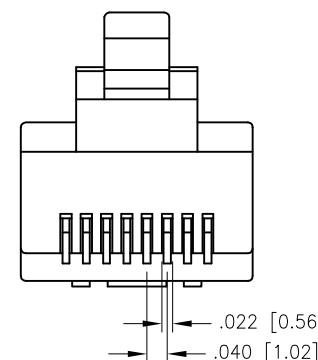
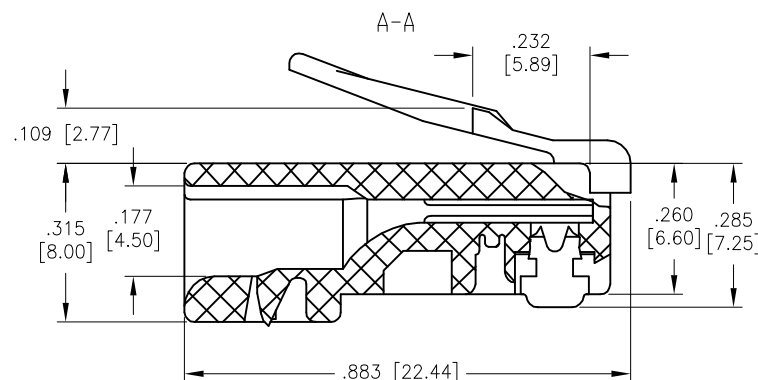


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/16/12	
A		UPDATE DRAWING	6/20/16	AY/LL

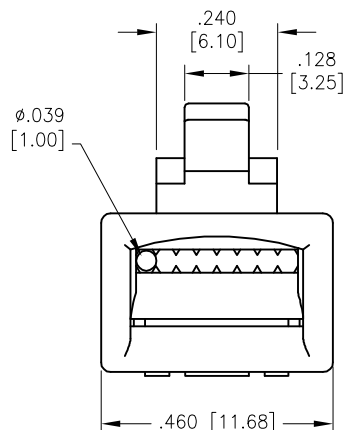

SPECIFICATIONS:

Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Clear
 Contacts: Copper Alloy
 Plating:
 Gold over Nickel underplate overall
 See chart for thickness
 Electrical:
 Voltage rating: 150 VAC rms
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +70°C
 Environmental:
 Lead free, RoHS compliant.



"X"	GOLD PLATING
U	15 µin
W	30 µin
G	50 µin

REPLACE "X" IN PART NUMBER
 WITH GOLD THICKNESS DESIGNATOR Reference.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		
---	--	--