


APPROVED: _____

DATE: _____ TITLE: _____


| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 4/8/05 | |
| A | | REDRAWN | 10/20/09 | |

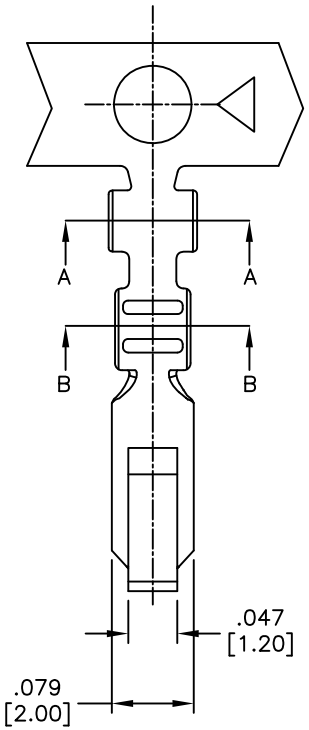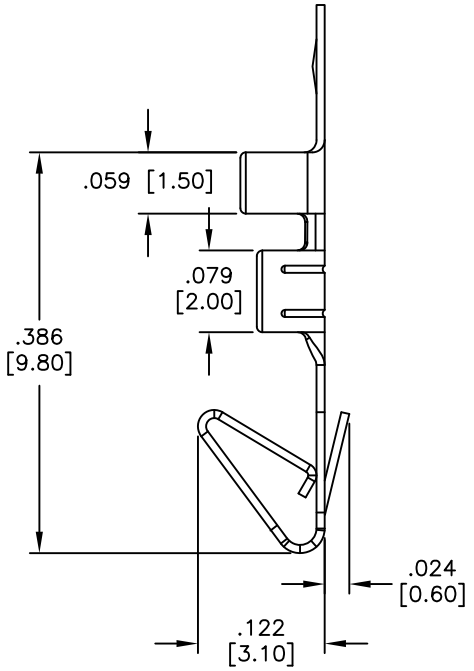


SECTION:A–A

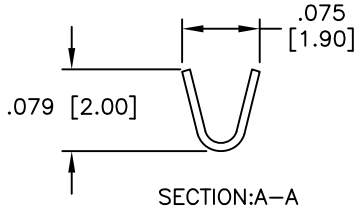


SECTION:B–B

SPECIFICATIONS:
Material:
Contact: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Wire range: 22–28 AWG
Voltage rating: 250V AC,DC
Current rating: 2.5 Amps max
Contact resistance: 20 mohms max
Insulation resistance: 1000 mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +85°C
Packaging:
B = 1,000 pieces loose cut
R = 10,000 pieces on reel
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | SS | 4/8/05 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE: CRIMP CONTACT

| SIZE | PART NO. | REV. |
|---|---|---|
| X | MTS-C-X | A |

| REF: | SCALE: | SHEET |
|---|---|---|
| S00019C | NTS | 1 OF 1 |