


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/29/19	
A		UPDATE DRAWING.	5/20/21	WX/LW
B		UPDATE DRAWING.	5/24/21	WX/LW


APPROVED: _____


DATE: _____ TITLE: _____

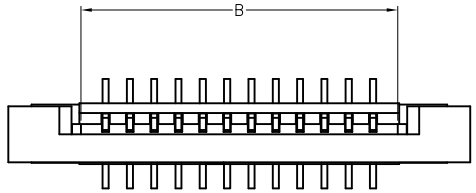


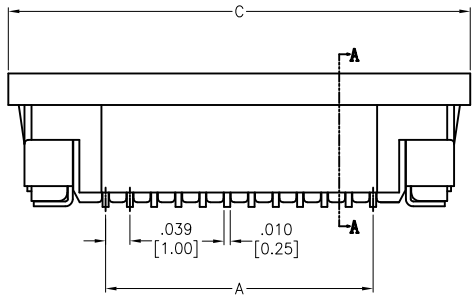



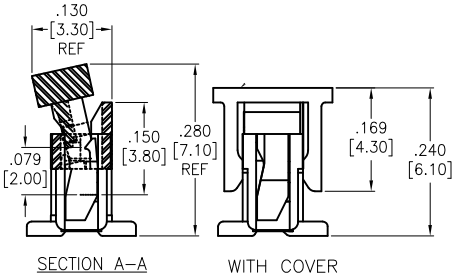

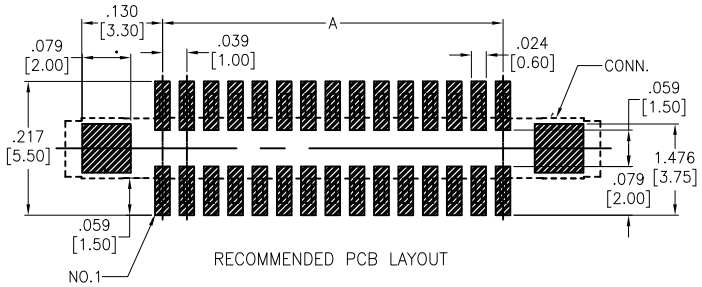

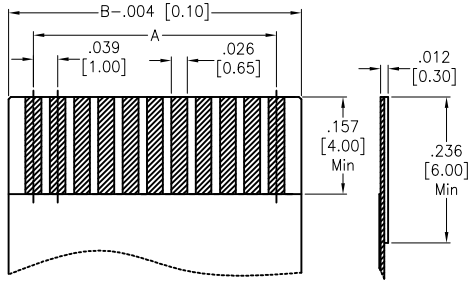

SPECIFICATIONS:
Material:
Housing: Hi–temp thermoplastic, rated UL 94V–0, Color: Natural
Actuator: Hi–temp thermoplastic, rated UL 94V–0, Color: Black
Contacts: Copper Alloy
Holddown: Copper Alloy, Tin plated
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 0.5A max
Contact resistance: 40 mohms max
Insulation resistance: 500 Mohms min
Dielectric withstanding voltage: 200 VAC for 1 minute
Temperature Rating:
–25°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

PACKAGED ON TAPE & REEL
Positions: 04 thru 32
A= .039 [1.00] x No. of Spaces
B= .039 [1.00] x No. of Spaces + .083 [2.10]
C= .039 [1.00] x No. of Spaces + .319 [8.10]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

DRAWN	OW	8/29/19
CHECKED	LW	8/29/19
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE, TOP ENTRY

SIZE	PART NO.	REV.
X	PCA-2-CC-XX-V-3-T/R	B

REF: S00165C | SCALE: NTS | SHEET 1 OF 1